

PIPE FITTINGS & VALVES



COMBINATION NIPPLES

CRIMPTEK - GROOVED STEEL & SS 316

FEATURES & APPLICATIONS:


• Low pressure fluid transfer, suction and discharge. Working pressures may very with hose type and clamping system used to install couplings.

• Combination Nipples are recommended for low pressure discharge and suction service for compatible liquids. NOT for compressible products such as Air, Nitrogen and Steam.

*All blank end & grooved combination nipples are made using Schedule 40 pipe



STEEL - GROOVED

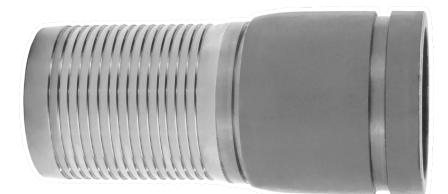

316 SS - GROOVED


SIZE	STEEL GROOVED	316 SS - GROOVED
1"	SF100SGC	SF100SSG6C
1-1/4"	SF125SGC	SF125SSG6C
1-1/2"	SF150SGC	SF150SSG6C
2"	SF200SGC	SF200SSG6C
2-1/2"	SF250SGC	SF250SSG6C
3"	SF300SGC	SF300SSG6C
4"	SF400SGC	SF400SSG6C
6"	SF600SGC	SF600SSG6C

800.231.0734

Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product. Seal Fast.com



PIPE FITTINGS & VALVES

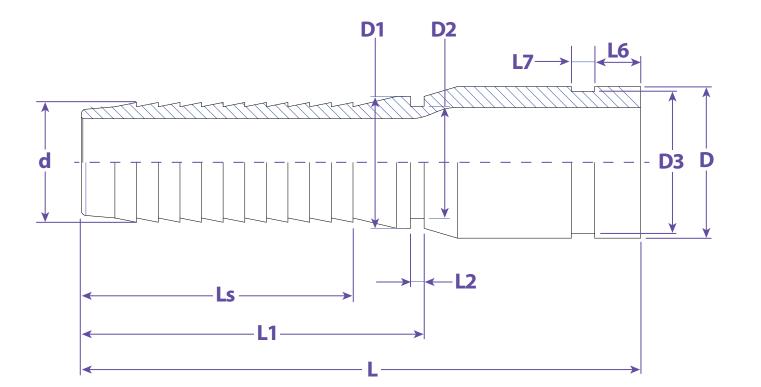

Dimensions												
L	L1	L2	L6	L7	Ls	D	D1	D2	D3	d	Part #	
4.528	2.618	0.118	0.630	0.315	2.008	1.339	1.268	1.169	1.220	1.035	SF100	
4.528	2.618	0.118	0.630	0.315	2.028	1.681	1.520	1.413	1.575	1.280	SF125	
4.764	2.756	0.118	0.630	0.315	2.402	1.913	1.677	1.563	1.783	1.535	SF150	
5.236	3.130	0.118	0.630	0.315	2.559	2.394	2.185	2.059	2.264	2.031	SF200	
5.906	3.504	0.126	0.630	0.315	2.756	2.874	2.752	2.610	2.717	2.531	SF250	
7.008	4.370	0.126	0.630	0.315	3.543	3.500	3.315	3.150	3.346	3.031	SF300	
7.598	4.626	0.126	0.630	0.374	3.976	4.500	4.311	4.157	4.331	4.031	SF400	
9.331	6.142	0.157	0.630	0.374	5.335	6.626	6.358	6.181	6.457	6.047	SF600	

TITLE COMBINATION NIPPLES - CRIMP STYLE - GROOVEDS DISCLAIMER All drawings and specifications are subject to change without price Drawings represent general dimensions of our



sales@Seal Fast.com

800.231.0734

Seal Fast.com

5603 Harvey Wilson Drive, Houston, TX 77020