



EXTERNAL SWAGE HEAVY DUTY INDUSTRIAL HOSE FERRULES - FD

FEATURES & APPLICATIONS:

• Use with Industrial HD Male Stems

• When used with corresponding HD Male Stems, provide a permanent end connection to rubber industrial hoses for use in the toughest applications.

• Hose applications: Tank Truck, Chemical, Mud Suction, OS&D, Oil Discharge, Frac-Tank, Water Discharge, Water Suction, Water Jetting, Hot Tar & Asphalt, Material Handling, Textile Air, Wire Air, Petroleum and Marine



ZINC PLATED STEEL

ZINC PLATED STEEL									
I.D.	HOSE OD SIZE RANGE	F OD	ERRULE SIZE	LG	FWT	ZINC PLATED STEEL #			
3″	4" to 4-1/8"	4-1/2″	4-1/4″	5″	1/8″	HD300FD			
4″	5-1/16" to 5-3/16"	5-9/16"	5-5/16"	5-1/2″	1/8″	HD400FD			
6″	7-5/8" to 8"	8-5/8″	8-1/8″	7-1/2″	1/4″	HD600FC			

Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.

sales@Seal Fast.com

800.231.0734


Seal Fast.com

5603 Harvey Wilson Drive, Houston, TX 77020



PIPE FITTINGS & VALVES



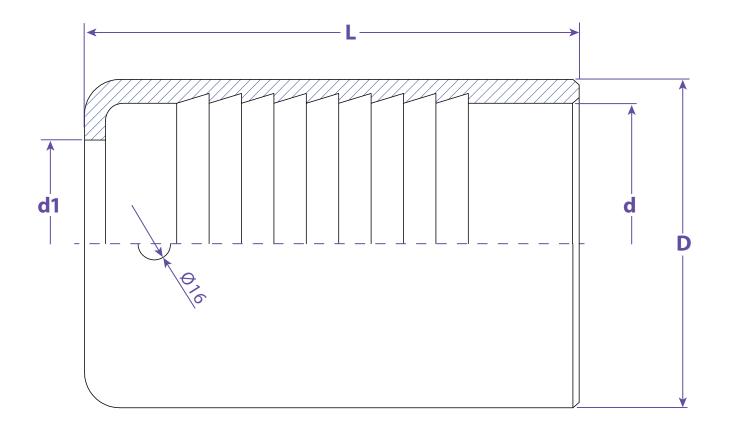

Dimensions									
L	D	d	d1	Part #					
5	4.2519685	4.1260	3.5827	HD300FD					
5.5118	5.5630	5.3110	4.5669	HD400FD					
7.4803	8.6260	8.1260	6.7717	HD600FC					

