






FEATURES & APPLICATIONS:

- Use with Industrial HD Male Stems
- When used with corresponding HD Male Stems, provide a permanent end connection to rubber industrial hoses for use in the toughest applications.
- Hose applications: Tank Truck, Chemical, Mud Suction, OS&D, Oil Discharge, Frac-Tank, Water Discharge, Water Suction, Water Jetting, Hot Tar & Asphalt, Material Handling, Textile Air, Wire Air, Petroleum and Marine



ZINC PLATED STEEL								
I.D.	HOSE OD SIZE RANGE	OD	FERRULE SIZE ID	LG	FWT	ZINC PLATED STEEL #		
3"	4-1/8" to 4-1/4"	5"	4-1/2"	5″	1/4"	HD300FE		
4"	5-1/4" to 5-3/8"	6"	5-1/2"	5-1/2"	1/4"	HD400FE		



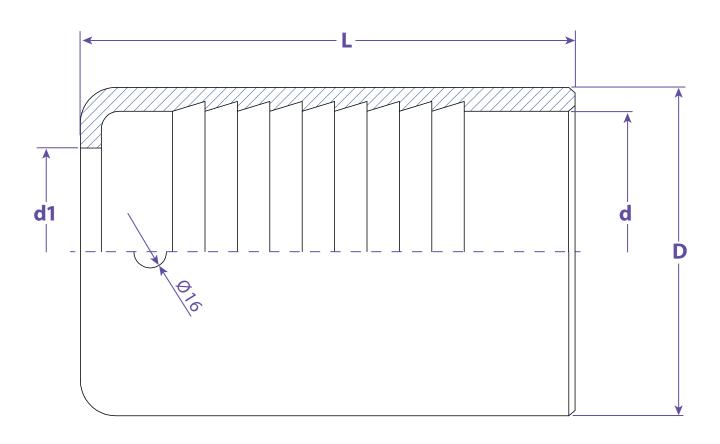

Dimensions								
L	D	d	d1	Part #				
127	127	114.4	91	HD300FE				
140	152.4	139.7	116	HD400FE				

HEAVY DUTY INDUSTRIAL HOSE FERRULES - FE					
DISCLAIMER All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions of the part will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.	Steel Tube				

PART#



DRAWING NOT TO SCALE

HD...FE