



SEALFAST
THE SIMPLE SOLUTION

HOSES
THERMOPLASTIC




CONTITECH

PVC-1500 CLEAR SUCTION

FEATURES & APPLICATIONS:

- General water suction & discharge hose for industry, agriculture, construction & septic tank cleaning. It is 50% lighter than rubber.
- The working pressure & vacuum ratings are based on ambient temperature of 70° F & will vary inversely with temperature changes.

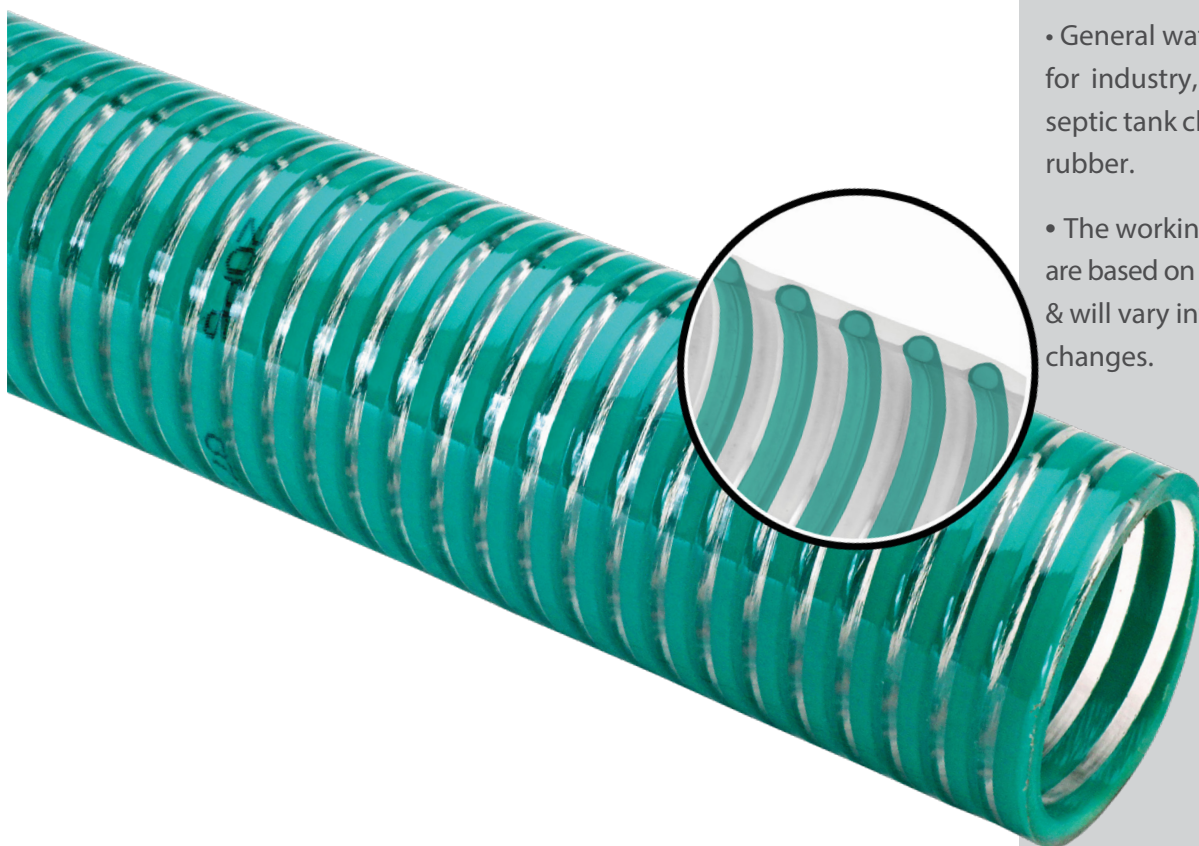

TECHNICAL DATA:

- **Temp Range:** -15° F to +150° F
- **Cover:** Clear Pliovic® compound Non-Branded
- **Tube:** Clear Pliovic® compound
- **Reinforcement:** Rigid Pliovic® Helix
- **Safety Factor:** 3:1 min
- **Branding:**

CLEAR PLIOVIC®

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Vacuum Rating "HG"	Part #
1-1/2"	1.78"	100'	89	---	6"	0.41	29	1500 150
2"	2.31"	100'	79	---	8"	0.61	29	1500 200
3"	3.38"	100'	65	---	12"	1.11	29	1500 300
4"	4.46"	100'	55	---	16"	1.62	29	1500 400
6"	6.57"	100'	47	---	36"	3.44	29	1500 600



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.