




## CONTITECH

### PVC-1600 OLIVE GREEN SUCTION

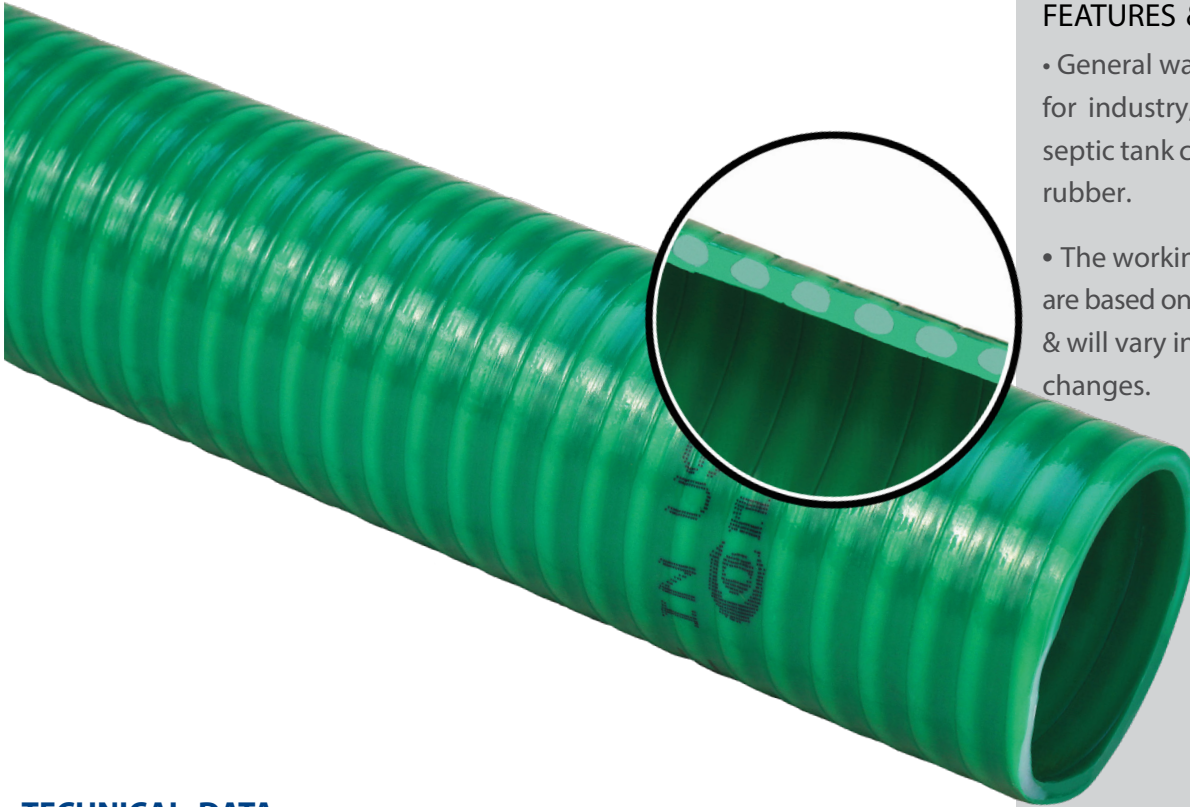

#### FEATURES & APPLICATIONS:

- General water suction & discharge hose for industry, agriculture, construction & septic tank cleaning. It is 50% lighter than rubber.
- The working pressure & vacuum ratings are based on ambient temperature of 70° F & will vary inversely with temperature changes.

#### TECHNICAL DATA:

- **Temp Range:** -15° F to +150° F
- **Cover:** Olive Green Pliovic® compound Non-Branded
- **Tube:** Olive Green Pliovic® compound
- **Reinforcement:** Rigid Pliovic® Helix
- **Safety Factor:** 3:1 min
- **Branding:**

#### OLIVE GREEN PLIOVIC®

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Vacuum Rating "HG"	Part #
1"	1.24"	100'	106	---	5"	0.25	29	1600 100
1-1/4"	1.53"	100'	89	---	5"	0.34	29	1600 125
1-1/2"	1.78"	100'	89	---	6"	0.41	29	1600 150
2"	2.32"	100'	79	---	8"	0.63	29	1600 200
2-1/2"	2.85"	100'	89	---	10"	0.87	29	1600 250
3"	3.44"	100'	65	---	12"	1.15	29	1600 300
4"	4.43"	100'	55	---	16"	1.73	29	1600 400
6"	6.57"	25'/25'/100'	47	---	36"	3.17	29	1600 600



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.