




PETROLEUM

CRUDE OIL SUCTION
"FRAC HOSE"

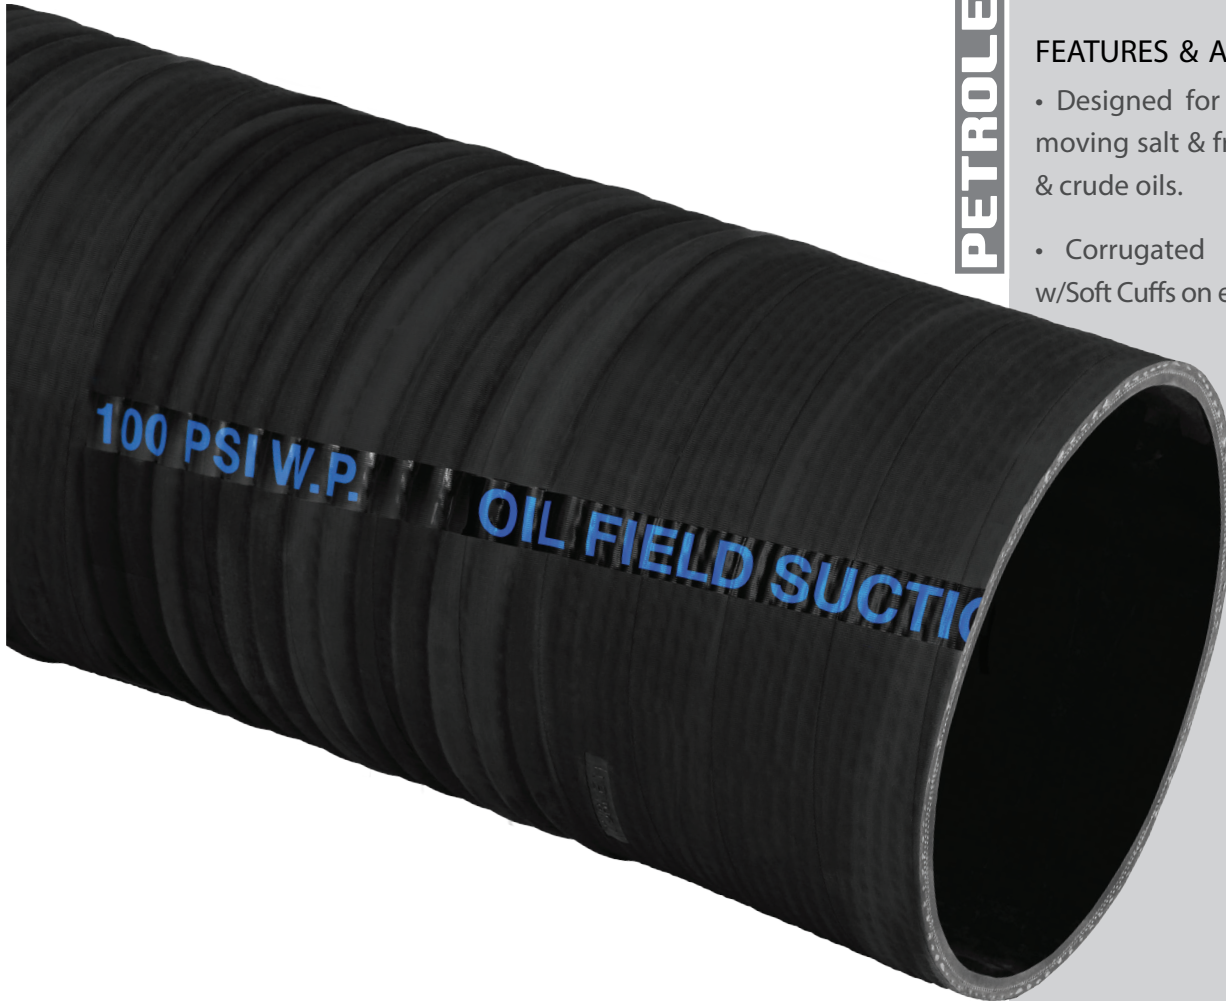

FEATURES & APPLICATIONS:

- Designed for use as a frac-tank hose moving salt & fresh water, drilling muds, & crude oils.
- Corrugated for increased flexibility w/Soft Cuffs on each end for easy coupling.

TECHNICAL DATA:

- **Temp Range:** -22° F to +212° F
- **Cover:** Black, CR/NBR
- **Tube:** CR/NBR
- **Reinforcement:** High tensile textile fabric; steel wire helix; anti-static copper wire
- **Safety Factor:** 3:1 min
- **Branding:**

NOTES:

- Recommended for CRUDE OIL ONLY.
- *NOT RECOMMENDED FOR REFINED PETROLEUM PRODUCTS.



NITRILE BLEND

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Part #
8"	8.66"	40'	100	---	2"	.79	COS 800 40
	8.66"	48'	100	---	3"	.93	COS 800 48
	8.66"	60'	100	---	4"	1.39	COS 800 60