




PETROLEUM

PETROLEUM

POLYURETHANE VAPOR RECOVERY
SERIES 1975

FEATURES & APPLICATIONS:

• Designed to be Biofuel compatible, this specially formulated polyurethane vapor recovery hose handles gasoline, ethanol (up to E98), diesel & biodiesel (up to B100 meeting ASTM D6751 criteria). The polyurethane construction is non-permeable, light weight than conventional TPR/Rubber hose. It has superior sub-zero flexibility.

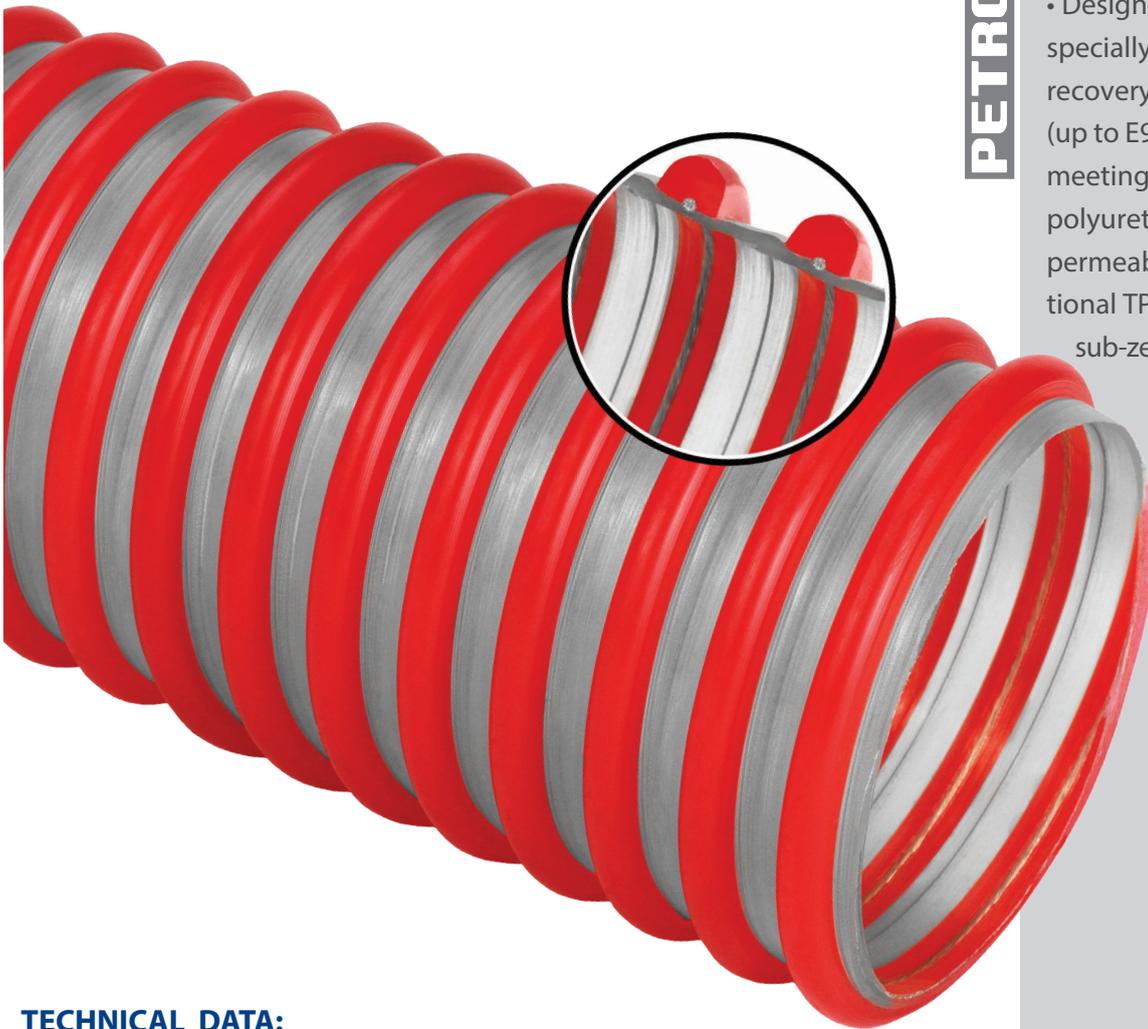

TECHNICAL DATA:

- **Temp Range:** -40° F to +150° F
- **Cover:** Clear Polyurethane w/Rigid Red PVC Helix (staticwire included)
- **Tube:** n/a
- **Reinforcement:** n/a
- **Safety Factor:** 3:1 min
- **Branding:**

POLYESTER BRAID POLYURETHANE

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Vacuum Rating "HG"	Part #
3"	3.55"	100'	13	39	4.5"	.95	n/a	1975 300