




FLANGES

GREEN NON-ASBESTOS FLANGE GASKET

FEATURES & APPLICATIONS:

- Compressed non-asbestos gasket sheet of aramid fibers mineral fibers and inorganic filler bonded with synthetic NBR elastomers.
- Suitable for oil-resistant gasket material for light to medium loading. It is suitable for low operating pressure in transformers, compressors & similar equipment. It can be used in low surface pressure components like valve covers, pans & internal combustion engines, flanges.

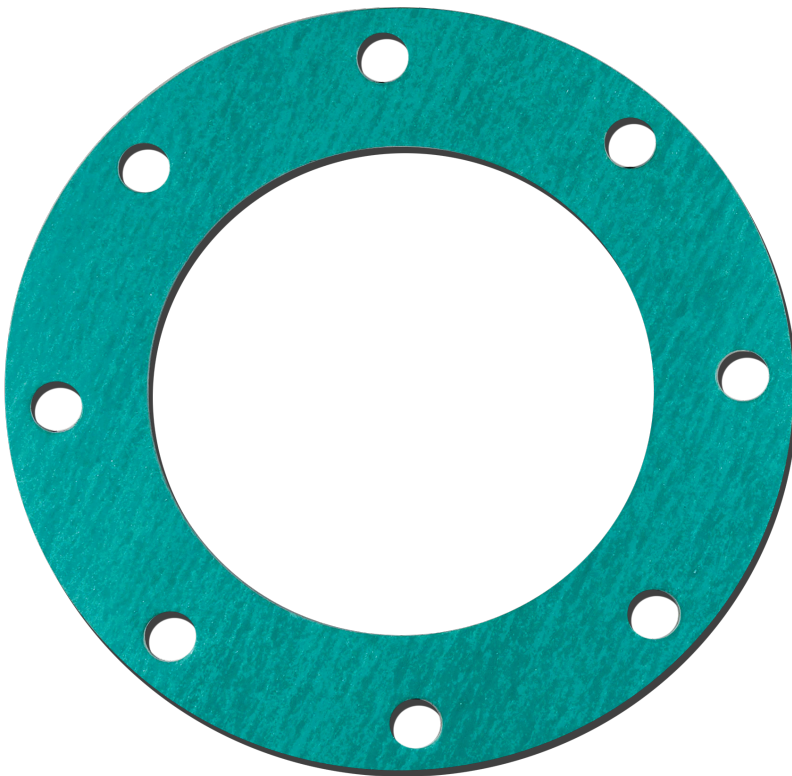

FLANGE GASKET

ID	GREEN NON-ASBESTOS
1"	FGNA100
1-1/4"	FGNA125
1-1/2"	FGNA150
2"	FGNA200
2-1/2"	FGNA250
3"	FGNA300
4"	FGNA400
5"	FGNA500
6"	FGNA600
8"	FGNA800
10"	FGNA1000
12"	FGNA1200




Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.



SEALFAST
THE SIMPLE SOLUTION

PIPE FITTINGS & VALVES

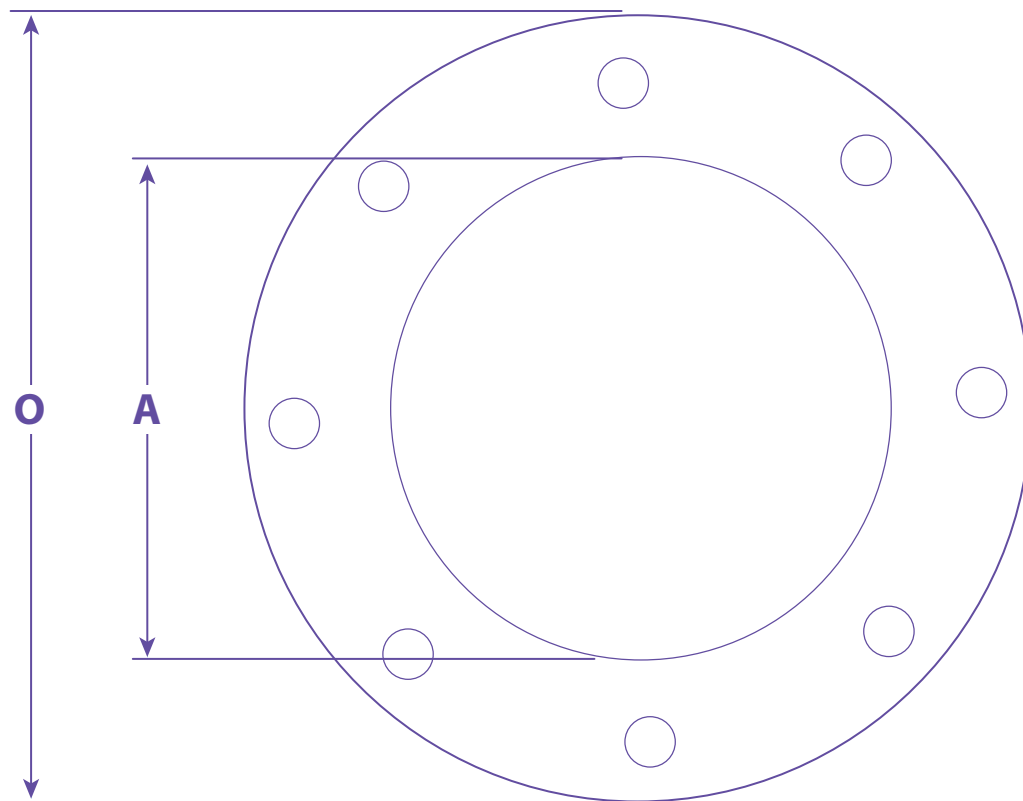

Dimensions						
ID	Overall Dim	Bolt Holes #	Hole Dim	Bolt Hole Circle	Thick	Part #
A	O					
1-5/16	4-1/4	4	5/8	3-1/8	1/16"	FGNA100
1-21/32	4-5/8	4	5/8	3-1/2	1/16"	FGNA125
1-29/32	5.00	4	5/8	3-7/8	1/16"	FGNA150
2-3/8	6.00	4	3/4	4-3/4	1/16"	FGNA200
2-7/8	5.00	4	3/4	5-1/2	1/16"	FGNA250
3-1/2	7-1/2	4	3/4	6.00	1/16"	FGNA300
4-1/2	9.00	8	3/4	7-1/2	1/16"	FGNA400
5-9/16	10.00	8	7/8	8-1/2	1/16"	FGNA500
6-5/8	11.00	8	7/8	9-1/2	1/16"	FGNA600
8-5/8	13-1/2	8	7/8	11-3/4	1/16"	FGNA800
10-3/4	16.00	12	1	14-1/4	1/16"	FGNA1000
12-3/4	19.00	12	1	17.00	1/16"	FGNA1200

TITLE FLANGES - GREEN NON-ASBESTOS GASKET

DISCLAIMER

All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions of the part will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL

GREEN NON-ASBESTOS

DRAWING NOT TO SCALE

PART

FDNA...

