




SEALFAST
THE SIMPLE SOLUTION

**COUPLINGS
& ACCESSORIES**



TYPE C

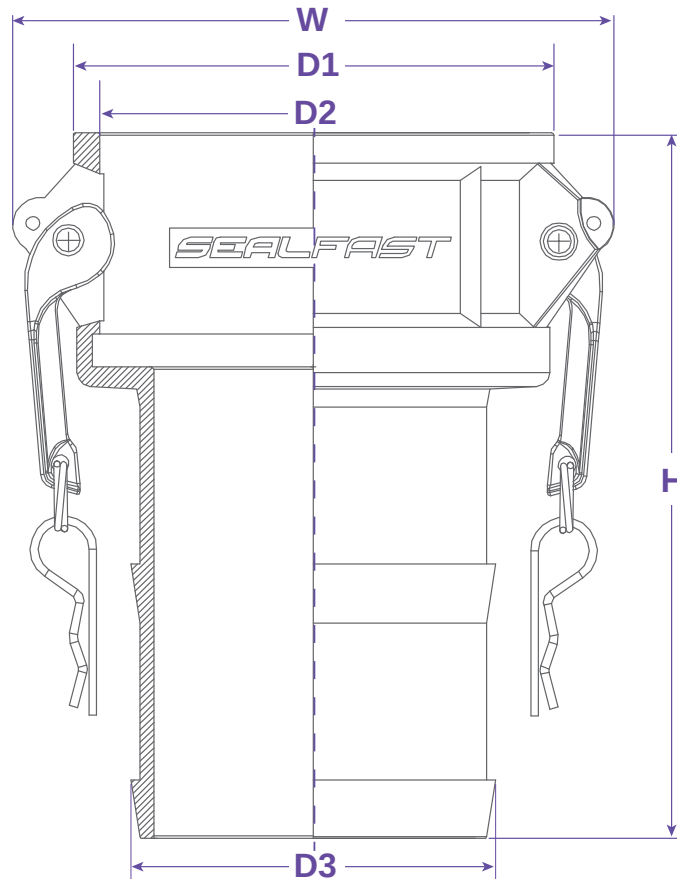

FEATURES & APPLICATIONS:

• General Uses:

A camlock fitting is a type of coupling that is used to connecting hose and or pipes together that transfers liquids, powders and granules. A straight through connection is made that maintains the pipe size and allows the free flow of materials being transferred.

Size	Working PSI	D1	D2	D3	H	W	PART #
1/2"	125	1.299	0.965	0.594	2.480	2.008	C050IBR
1/2" x 3/4"							C05075IBR
3/4"	150	1.614	1.272	0.843	3.248	2.284	C075IBR
1"	150	1.835	1.465	1.051	3.701	2.598	C100IBR
1-1/4"	150	2.213	1.811	1.319	4.075	3.071	C125IBR
1-1/2"	150	2.500	2.122	1.567	4.232	3.386	C150IBR
2"	150	2.913	2.508	2.067	4.862	3.780	C200IBR
2-1/2"	150	3.465	3.008	2.598	5.315	4.331	C250IBR
3"	150	4.083	3.626	3.098	5.992	5.079	C300IBR
4"	150	5.311	4.732	4.098	6.240	6.181	C400IBR
5"	75	6.378	5.752	5.126	7.441	7.323	C500IBR
6"	75	7.579	6.949	6.126	8.642	8.898	C600IBR

WARNING: Cam & Groove Couplings should **NOT** be used with any compressed gas, including steam or air. Metal fittings should **NOT** be used with Polypropylene Cam & Groove. Dust Caps and Dust Plugs are **NOT** designed for pressure applications.

Note: All Seal Fast Cam & Groove Stainless Bodies are 316 Investment with 304 Handles.

TITLE **TYPE C - FEMALE COUPLER X SHANK**

DISCLAIMER

All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions in the drawing will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL

BRASS

DRAWING NOT TO SCALE

PART

C...IBR

