




SEALFAST
THE SIMPLE SOLUTION

COUPLINGS & ACCESSORIES

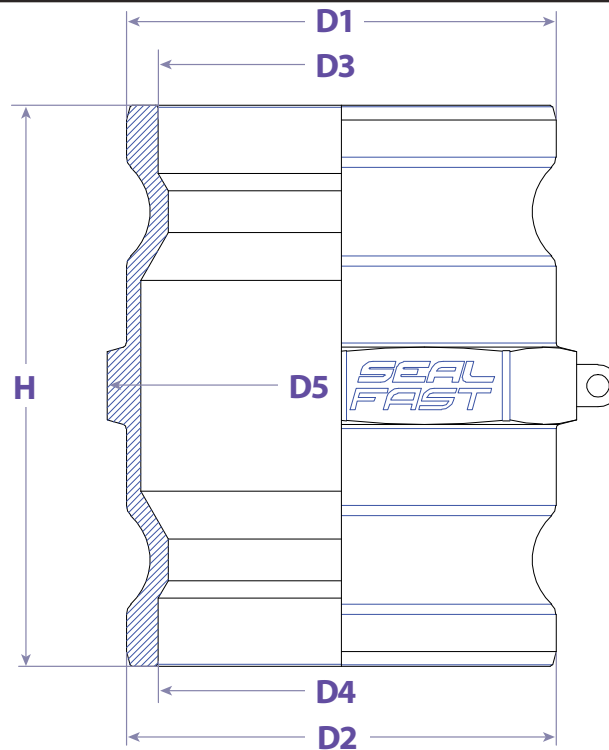

TYPE SA

Size	Working PSI	D1	D2	D3	D4	D5	H	PART #
3/4"	150	1.259	1.259	0.880	0.880	1.150	2.496	SA 075SS
1"	150	1.445	1.445	1.067	1.067	1.406	3.189	SA 100SS
1-1/4"	150	1.789	1.789	1.287	1.287	1.669	3.362	SA 125SS
1-1/2"	150	2.102	2.102	1.591	1.591	2.043	3.543	SA 150SS
1-1/2" x 2"	150	2.102	2.480	1.606	2.031	1.716	3.976	SA 1520SS
2"	150	2.480	2.480	2.008	2.008	2.441	3.681	SA 200SS
2" x 2-1/2"	150	2.480	2.984	1.811	2.492	2.835	4.409	SA 2025SS
2" x 3"	150	2.480	3.602	1.811	2.988	3.366	4.567	SA 2030SS
2-1/2"	150	2.480	2.984	2.401	2.401	2.921	3.976	SA 250SS
2-1/2" x 3"	150							SA 2530SS
3"	150	3.602	3.602	3.071	3.071	3.543	4.095	SA 300SS
3" x 4"	150	3.602	4.705	2.988	4.016	4.469	5.118	SA 3040SS
4"	150	4.705	4.705	4.016	4.016	4.646	4.350	SA 400SS
4" x 2"	150	4.705	2.484	4.154	1.949	0.000	5.039	SA 4020SS
4" x 6"	150	4.705	6.984	4.055	6.074	4.016	6.323	SA 4060SS
5"	75							SA 500SS
6"	75							SA 600SS

FEATURES & APPLICATIONS:

• General Uses:

A camlock fitting is a type of coupling that is used to connecting hose and or pipes together that transfers liquids, powders and granules. A straight through connection is made that maintains the pipe size and allows the free flow of materials being transferred.

WARNING: Cam & Groove Couplings should **NOT** be used with any compressed gas, including steam or air. Metal fittings should **NOT** be used with Polypropylene Cam & Groove. Dust Caps and Dust Plugs are **NOT** designed for pressure applications.

Note: All Seal Fast Cam & Groove Stainless Bodies are 316 Investment with 304 Handles.

TITLE TYPE SA

DISCLAIMER

All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions in the drawing will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL

SUS 316

DRAWING NOT TO SCALE

PART

SA...SS

