






TYPE DR

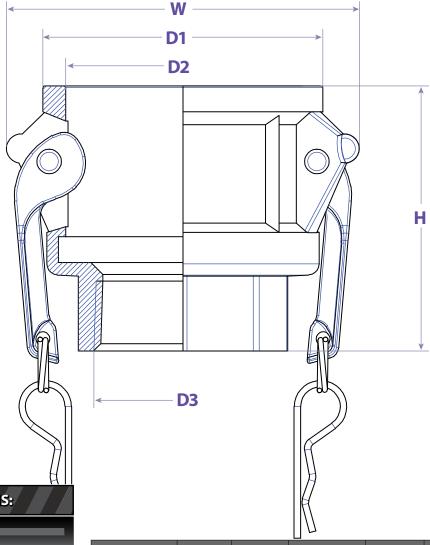

FEATURES & APPLICATIONS:

• General Uses:

A camlock fitting is a type of coupling that is used to connecting hose and or pipes together that transfers liquids, powders and granules. A straight through connection is made that maintains the pipe size and allows the free flow of materials being transfered.

Size	D1	D2	D3	Н	W	PART #
1-1/2" x 1"	2.571	2.122	1" NPT	2.638	3.469	DR1510AL
2" x 1-1/2"	2.992	2.508	1-1/2" NPT	2.835	3.780	DR2015AL
2-1/2" x 2"						DR2520AL
3" x 2"	4.134	3.626	2" NPT	3.032	5.079	DR3020AL
3" x 4"	4.134	3.626	4" NPT	6.339	5.079	DR3040AL
4" x 3"	5.354	4.732	3" NPT	3.543	6.181	DR4030AL

WARNING: Cam & Groove Couplings should **NOT** be used with any compressed gas, including steam or air. Metal fittings should **NOT** be used with Polypropylene Cam & Groove. Dust Caps and Dust Plugs are **NOT** designed for pressure applications.

Note: All Seal Fast Cam & Groove Stainless Bodies are 316 Investment with 304 Handles.

TYPE DR - FEMALE COUPLER X FEMALE NPT REDUCING D

DISCLAIMER

All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions in the drawing will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

A226AL

800.231.0734

PART #

MATERIAL

DR...AL



DRAWING NOT TO SCALE

sales@sealfast.com

sealfast.com