


**TYPE E**

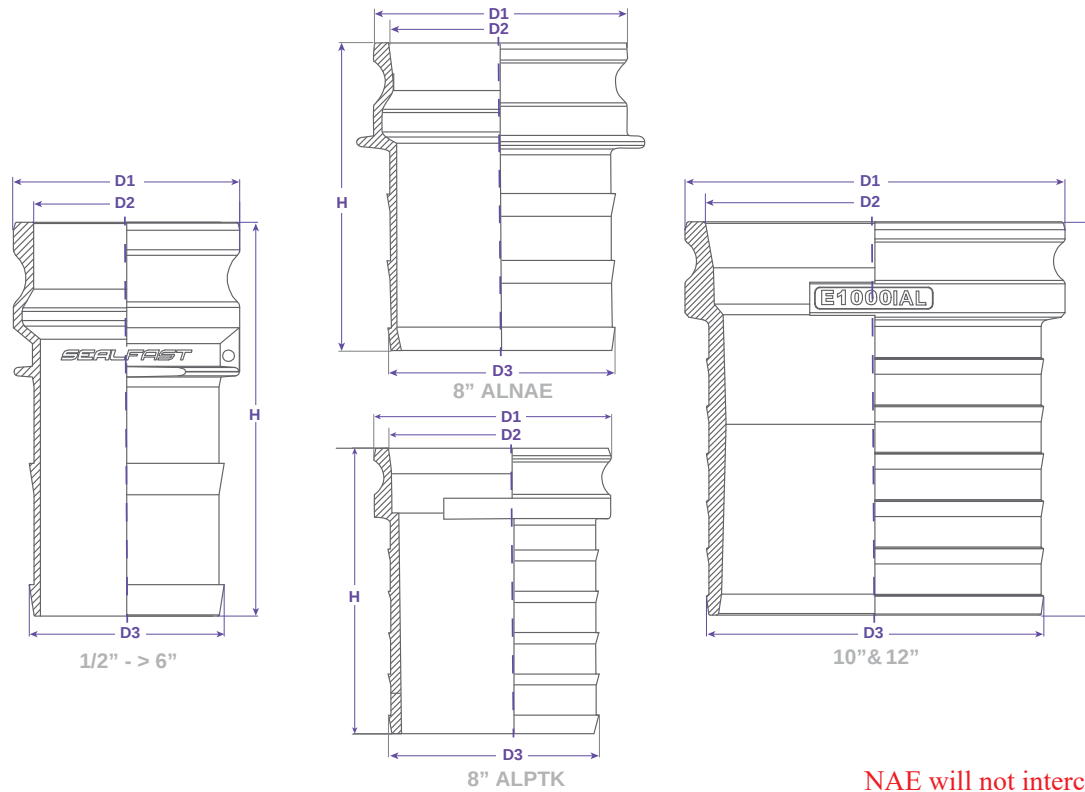

NAE will not interchange with PTK small body

Size	Working PSI	D1	D2	D3	H	PART #
1/2"	0	1.264	0.965	2.008	1.181	E050IAL
3/4"	0	1.614	1.272	2.284	1.280	E075IAL
1"	0	1.835	1.465	2.598	1.516	E100IAL
1-1/4"	0	2.260	1.811	2.992	1.850	E125IAL
1-1/2"	0	2.571	2.122	3.386	1.890	E150IAL
2"	0	2.992	2.508	3.780	2.126	E200IAL
2-1/2"	0	3.520	3.008	4.331	2.323	E250IAL
3"	0	4.138	3.626	5.079	2.323	E300IAL
4"	0	5.354	4.732	6.181	2.402	E400IAL
5"	0	6.378	5.752	7.323	2.480	E500IAL
6"	0	7.579	6.949	8.898	2.638	E600IAL
8"	0	10.158	9.131	11.575	3.819	E800IALNAE
8"	0	10.158	8.957	11.260	2.992	E800IALPTK
10"	0	13.268	11.402	14.478	4.335	E1000IAL
12"	0	15.276	13.504	16.553	4.364	E1200IAL

**FEATURES & APPLICATIONS:**

• **General Uses:**

A camlock fitting is a type of coupling that is used to connecting hose and or pipes together that transfers liquids, powders and granules. A straight through connection is made that maintains the pipe size and allows the free flow of materials being transferred.

**WARNING:** Cam & Groove Couplings should NOT be used with any compressed gas, including steam or air. Metal fittings should NOT be used with Polypropylene Cam & Groove. Dust Caps and Dust Plugs are NOT designed for pressure applications.

Note: All Seal Fast Cam & Groove Stainless Bodies are 316 Investment with 304 Handles.

TITLE <b>TYPE E - MALE ADAPTER X SHANK</b>	
<p><b>DISCLAIMER</b></p> <p>All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions in the drawing will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.</p>	<p>MATERIAL</p> <p><b>A226AL</b></p>
<p><b>DRAWING NOT TO SCALE</b></p>	<p>PART #</p> <p><b>E...IAL</b></p>

