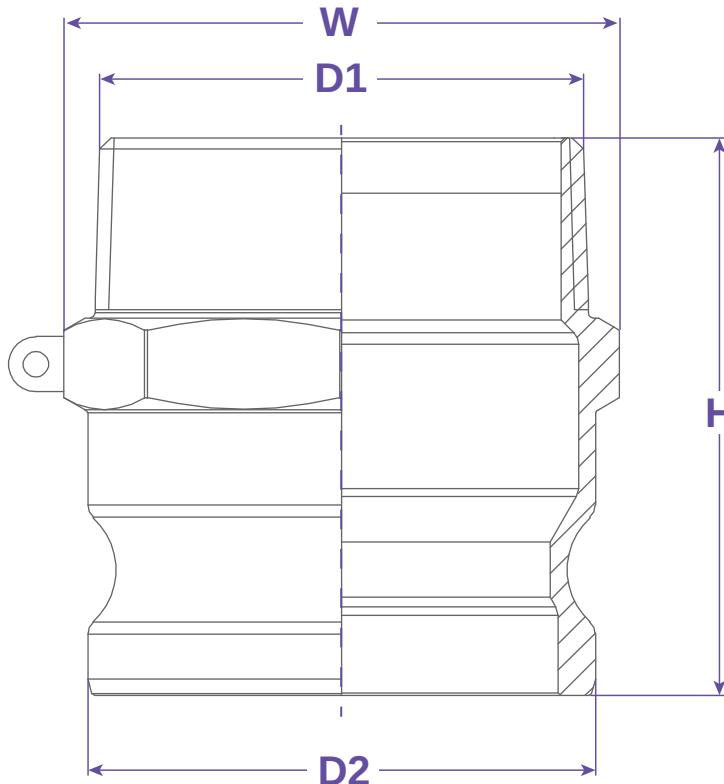



TYPE F


Size	Working PSI	D1	D2	W	H	PART #
1/2" NPT	125	0.957	0.957	0.976	2.028	F050IBR
1/2" x 3/4" NPT						F05075IBR
3/4" NPT	150	1.264	1.264	1.280	2.126	F075IBR
1" NPT	150	1.445	1.445	1.465	2.461	F100IBR
1-1/4" NPT	150	1.791	1.791	1.811	2.894	F125IBR
1-1/2" NPT	150	2.102	2.102	2.126	2.972	F150IBR
2" NPT	150	2.480	2.480	2.528	3.228	F200IBR
2-1/2" NPT	150	2.984	2.480	3.071	3.819	F250IBR
3" NPT	150	3.602	3.602	3.661	3.957	F300IBR
4" NPT	150	4.705	4.705	4.724	4.311	F400IBR
5" NPT	75	5.728	5.728	5.748	4.449	F500IBR
6" NPT	75	6.929	6.929	7.736	4.823	F600IBR

FEATURES & APPLICATIONS:
• General Uses:

A camlock fitting is a type of coupling that is used to connecting hose and or pipes together that transfers liquids, powders and granules. A straight through connection is made that maintains the pipe size and allows the free flow of materials being transferred.

WARNING: Cam & Groove Couplings should **NOT** be used with any compressed gas, including steam or air. Metal fittings should **NOT** be used with Polypropylene Cam & Groove. Dust Caps and Dust Plugs are **NOT** designed for pressure applications.

Note: All Seal Fast Cam & Groove Stainless Bodies are 316 Investment with 304 Handles.

TITLE TYPE F - MALE ADAPTER X MALE NPT	
DISCLAIMER	MATERIAL
All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions in the drawing will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.	BRASS
DRAWING NOT TO SCALE	PART # F...IBR