




TYPE B

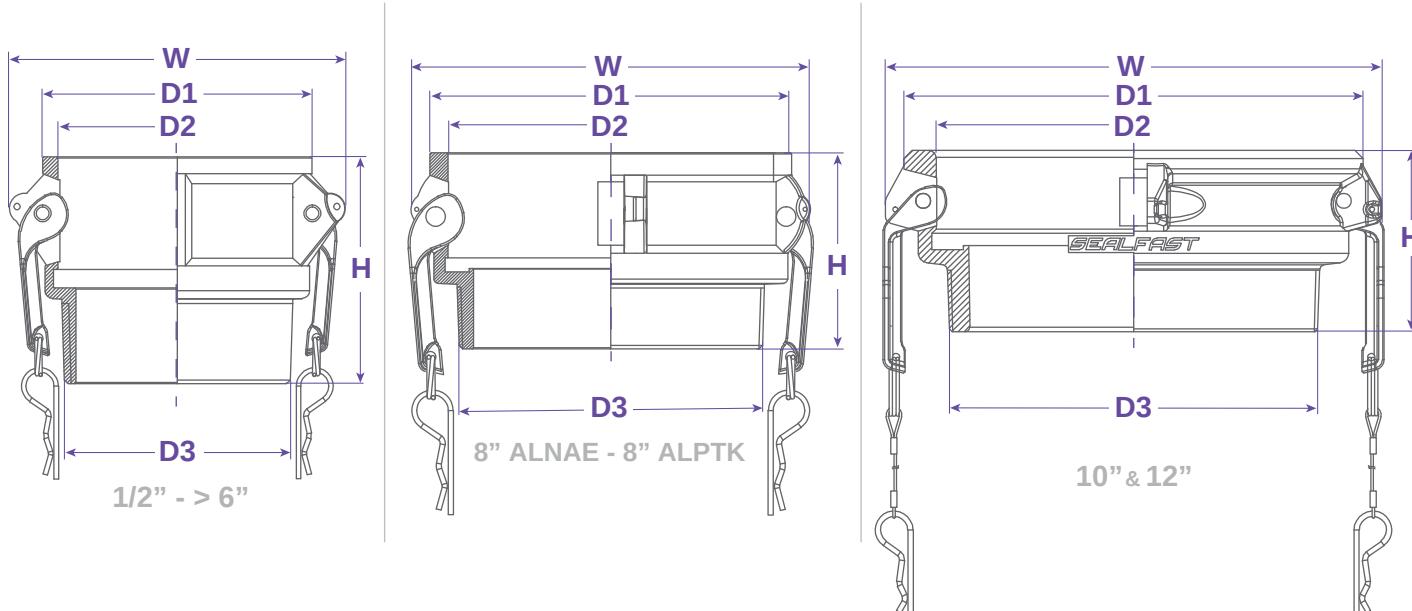

NAE will not interchange with PTK small body

Size	Working PSI	D1	D2	D3	W	H	PART #
1/2"	125	1.300	0.965	1/2" NTP	1.752	2.008	B050IAL
1/2"x 3/4"	150	1.614	1.272	1/2" NTP	1.831	2.284	B0507IAL
3/4"	150	1.614	1.272	3/4" NTP	1.831	2.284	B075IAL
1"	150	1.835	1.465	1" NTP	2.185	2.598	B100IAL
1-1/4"	150	2.260	1.811	1-1/4" NTP	2.598	2.992	B125IAL
1-1/2"	150	2.571	2.122	1-1/2" NTP	2.638	3.386	B150IAL
2"	150	2.992	2.508	2" NTP	2.874	3.780	B200IAL
2-1/2"	150	3.520	3.008	2-1/2" NTP	3.386	4.331	B250IAL
3"	150	4.138	3.626	3" NTP	3.504	5.118	B300IAL
4"	150	5.354	4.732	4" NTP	3.701	6.181	B400IAL
5"	75	6.378	5.752	5" NTP	3.780	7.323	B500IAL
6"	75	7.579	6.949	6" NTP	4.075	8.898	B600IAL
8"	40	10.158	9.142	8" NTP	5.519	11.221	B800IALNAE
8"	40	10.158	8.957	8" NTP	4.409	11.575	B800IALPTK

FEATURES & APPLICATIONS:

• General Uses:

A camlock fitting is a type of coupling that is used to connecting hose and or pipes together that transfers liquids, powders and granules. A straight through connection is made that maintains the pipe size and allows the free flow of materials being transferred.

WARNING: Cam & Groove Couplings should **NOT** be used with any compressed gas, including steam or air. Metal fittings should **NOT** be used with Polypropylene Cam & Groove. Dust Caps and Dust Plugs are **NOT** designed for pressure applications.

Note: All Seal Fast Cam & Groove Stainless Bodies are 316 Investment with 304 Handles.

TITLE TYPE B - FEMALE NPT X MALE NPT	
DISCLAIMER	MATERIAL
All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions in the drawing will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.	A226AL
DRAWING NOT TO SCALE	PART # B...IAL, ALNAE, ALPTK