



COMBINATION NIPPLES

MALE NPT - ALUMINUM

FEATURES & APPLICATIONS:

- Low pressure fluid transfer, suction and discharge. Working pressures may vary with hose type and clamping system used to install couplings.
- Combination Nipples are recommended for low pressure discharge and suction service for compatible liquids. NOT for compressible products such as Air, Nitrogen and Steam.




ALUMINUM

| ALUMINUM | |
|----------|--------|
| SIZE | |
| 1/2" | SF050A |
| 3/4" | SF075A |
| 1" | SF100A |
| 1-1/4" | SF125A |
| 1-1/2" | SF150A |
| 2" | SF200A |
| 2-1/2" | SF250A |
| 3" | SF300A |
| 4" | SF400A |
| 5" | SF500A |
| 6" | SF600A |



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.

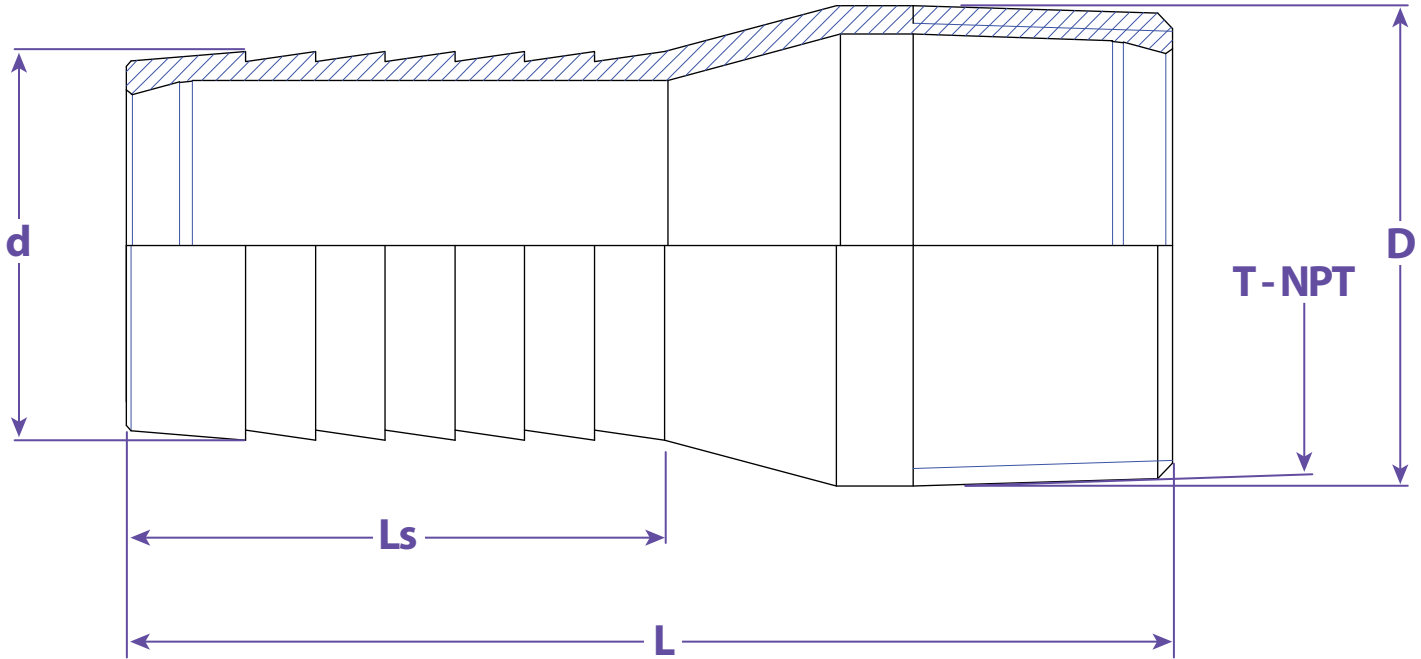

Dimensions

| T | L | Ls | D | d | Part # |
|--------|---------|--------|--------|--------|--------|
| 3/4" | 3.1102 | 1.5748 | 1.0512 | 0.7795 | SF075A |
| 1" | 3.3071 | 1.5748 | 1.3154 | 1.0354 | SF100A |
| 1-1/4" | 3.9370 | 1.8504 | 1.2992 | 1.2992 | SF125A |
| 1-1/2" | 4.1339 | 2.1260 | 1.5354 | 1.5354 | SF150A |
| 2" | 4.7244 | 2.4803 | 2.0315 | 2.0315 | SF200A |
| 2-1/2" | 5.5906 | 2.8937 | 2.5315 | 2.5315 | SF250A |
| 3" | 6.0236 | 3.3858 | 3.0315 | 3.0315 | SF300A |
| 4" | 7.0472 | 3.6220 | 4.0315 | 4.0315 | SF400A |
| 5" | 8.8583 | 5.4331 | 5.0315 | 5.0315 | SF500A |
| 6" | 10.9055 | 6.4567 | 6.0472 | 6.0472 | SF600A |

TITLE COMBINATION NIPPLES FOR STRAIGHT & HOSE - NPT THREAD

DISCLAIMER
All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions of the part will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL
Aluminum

DRAWING NOT TO SCALE

PART # SF...A

