



COMBINATION NIPPLES

MALE NPT - BRASS

FEATURES & APPLICATIONS:

• General Uses:


Working pressures may vary with type and clamping system used to install couplings.

Combination Nipples are recommended for low pressure discharge and suction service for compatible liquids. NOT for compressible products such as Air, Nitrogen and Steam.

*All blank end & grooved combination nipples are made using Schedule 40 pipe.

Seal Fast Crimp Combination Nipples are to be used with Seal Fast Ferrules and Crimp Sleeves. They are designed with an Interlock System which allows the Ferrule to be permanently attached to the coupling.

WORKING PRESSURE 200 PSI

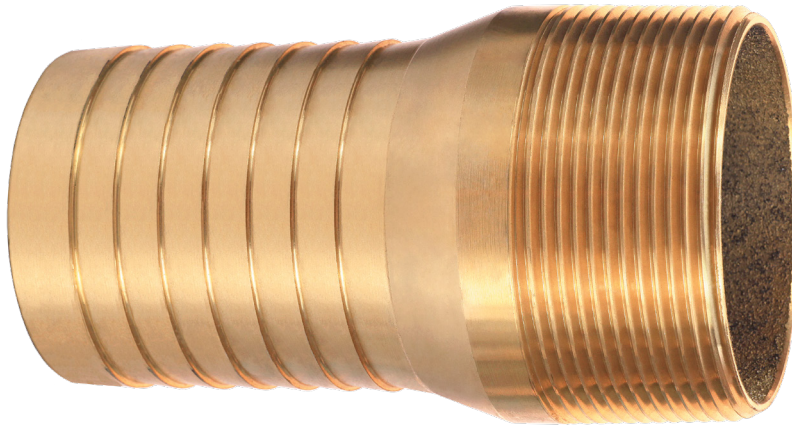

BRASS

* Not For Use With Potable Drinking Water Applications

BRASS

SIZE	
1/2"	SF050B
3/4"	SF075B
1"	SF100B
1-1/4"	SF125B
1-1/2"	SF150B
2"	SF200B
2-1/2"	SF250B
3"	SF300B
4"	SF400B




Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.



SEALFAST
THE SIMPLE SOLUTION

PIPE FITTINGS & VALVES

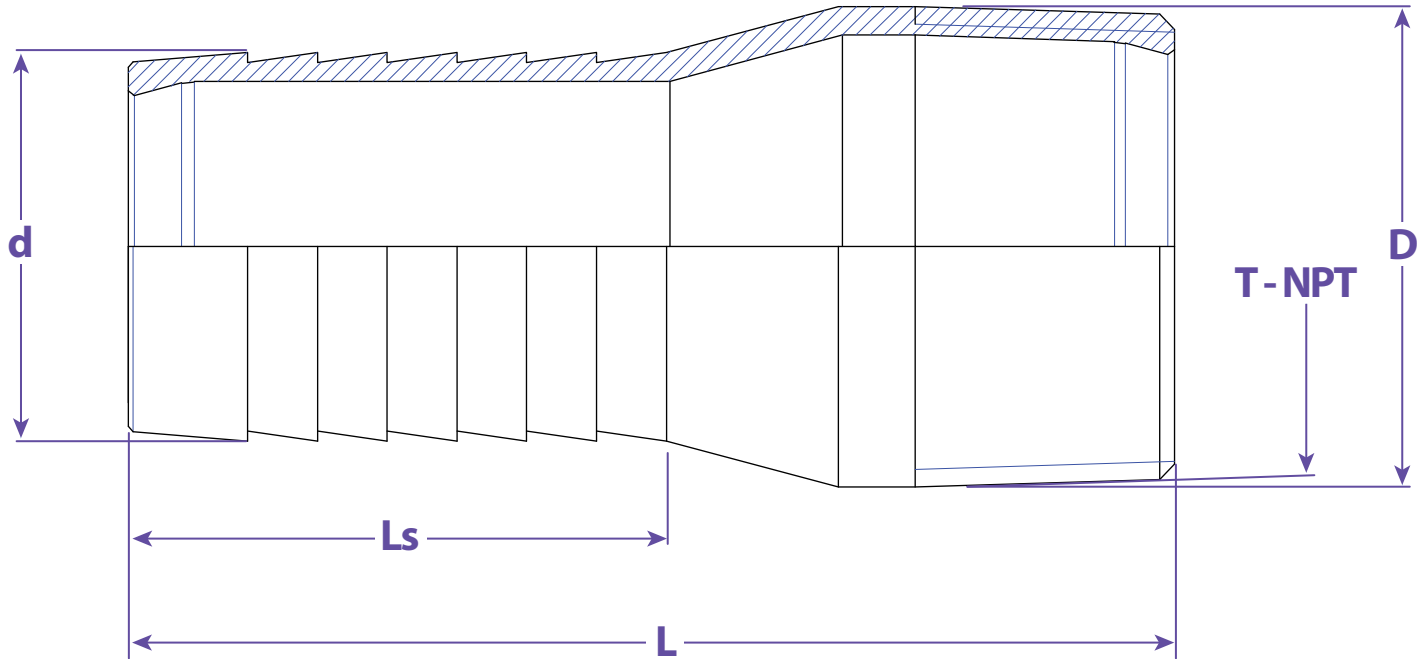

* Not For Use With Potable Drinking Water Applications

Dimensions

T	L	Ls	d	D	Part #
1/2"	3.1102	0.7835	0.5354	0.8543	SF050B
3/4"	3.1102	0.7953	0.7795	1.0709	SF075B
1"	3.3465	0.9843	1.0354	1.3386	SF100B
1-1/4"	3.9370	1.0079	1.2992	1.6811	SF125B
1-1/2"	4.1339	1.0236	1.5354	1.9134	SF150B
2"	4.7244	1.0591	2.0315	2.3937	SF200B
2-1/2"	5.5118	1.5709	2.5315	2.8740	SF250B
3"	6.1024	1.6339	3.0315	3.5000	SF300B
4"	7.1850	1.7323	4.0315	4.5118	SF400B

TITLE COMBINATION NIPPLES FOR STRAIGHT & HOSE - NPT THREAD

DISCLAIMER

All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions of the part will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL

Brass

DRAWING NOT TO SCALE

PART # SF...B

