




**COMBINATION NIPPLES**

**MALE NPT - BRASS**

**FEATURES & APPLICATIONS:**

- Low pressure fluid transfer, suction and discharge. Working pressures may vary with hose type and clamping system used to install couplings.
- Combination Nipples are recommended for low pressure discharge and suction service for compatible liquids. NOT for compressible products such as Air, Nitrogen and Steam.

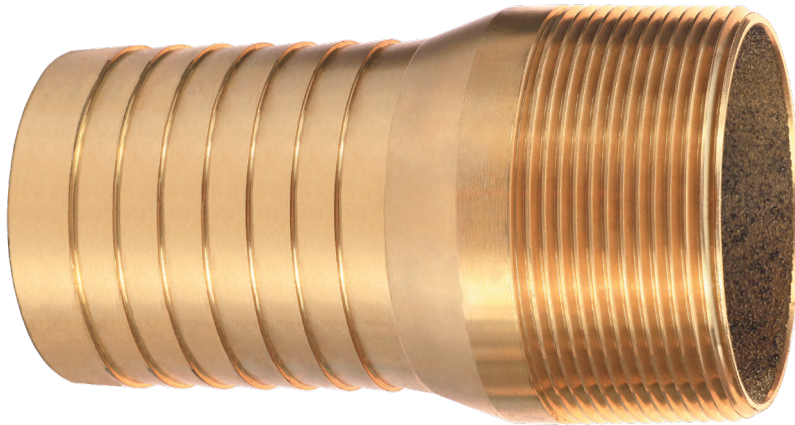


**BRASS**

\* Not For Use With Potable Drinking Water Applications

BRASS	
SIZE	
1/2"	SF050B
3/4"	SF075B
1"	SF100B
1-1/4"	SF125B
1-1/2"	SF150B
2"	SF200B
2-1/2"	SF250B
3"	SF300B
4"	SF400B



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.

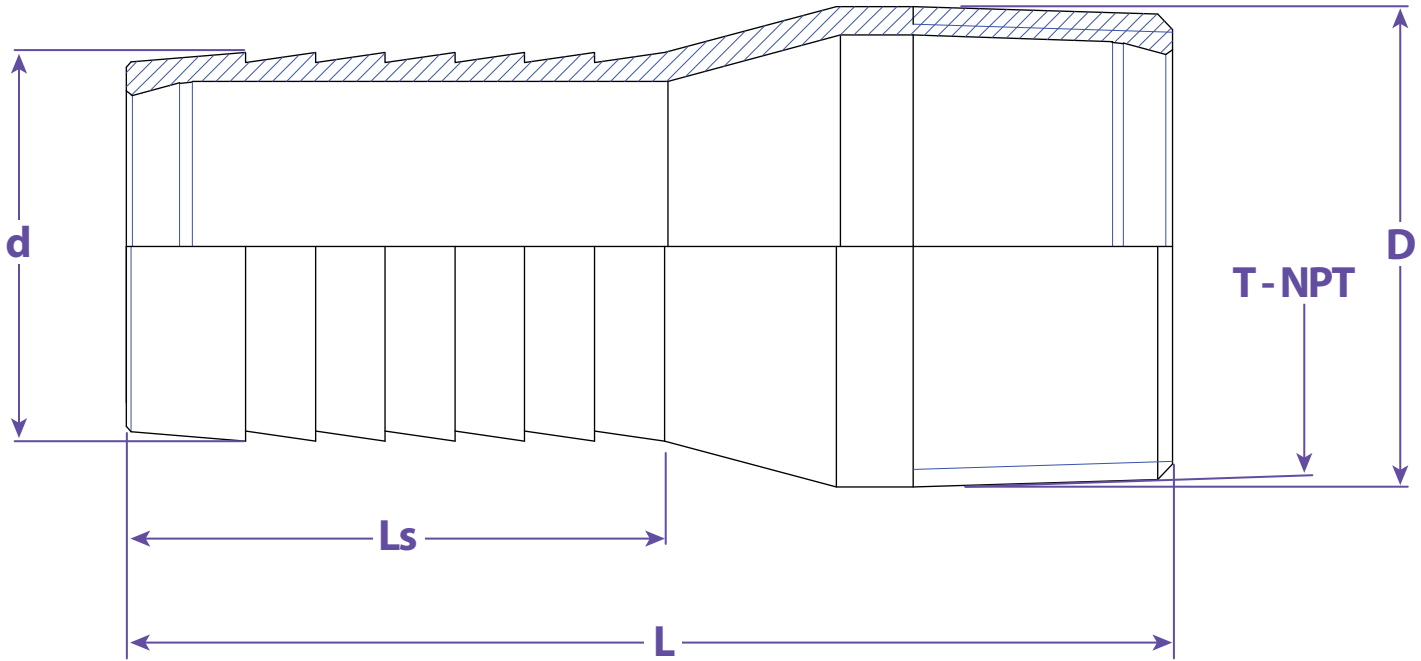

\* Not For Use With Potable Drinking Water Applications

**Dimensions**

T	L	Ls	d	D	Part #
1/2"	3.1102	0.7835	0.5354	0.8543	SF050B
3/4"	3.1102	0.7953	0.7795	1.0709	SF075B
1"	3.3465	0.9843	1.0354	1.3386	SF100B
1-1/4"	3.9370	1.0079	1.2992	1.6811	SF125B
1-1/2"	4.1339	1.0236	1.5354	1.9134	SF150B
2"	4.7244	1.0591	2.0315	2.3937	SF200B
2-1/2"	5.5118	1.5709	2.5315	2.8740	SF250B
3"	6.1024	1.6339	3.0315	3.5000	SF300B
4"	7.1850	1.7323	4.0315	4.5118	SF400B

**TITLE COMBINATION NIPPLES FOR STRAIGHT & HOSE - NPT THREAD**

<p><b>DISCLAIMER</b></p> <p>All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions of the part will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.</p>	<p><b>MATERIAL</b></p> <p>Brass</p>
<p><b>DRAWING NOT TO SCALE</b></p>	<p><b>PART #</b> SF...B</p>

