




PETROLEUM

PETROLEUM
POLYURETHANE DROP HOSE
SERIES 1980

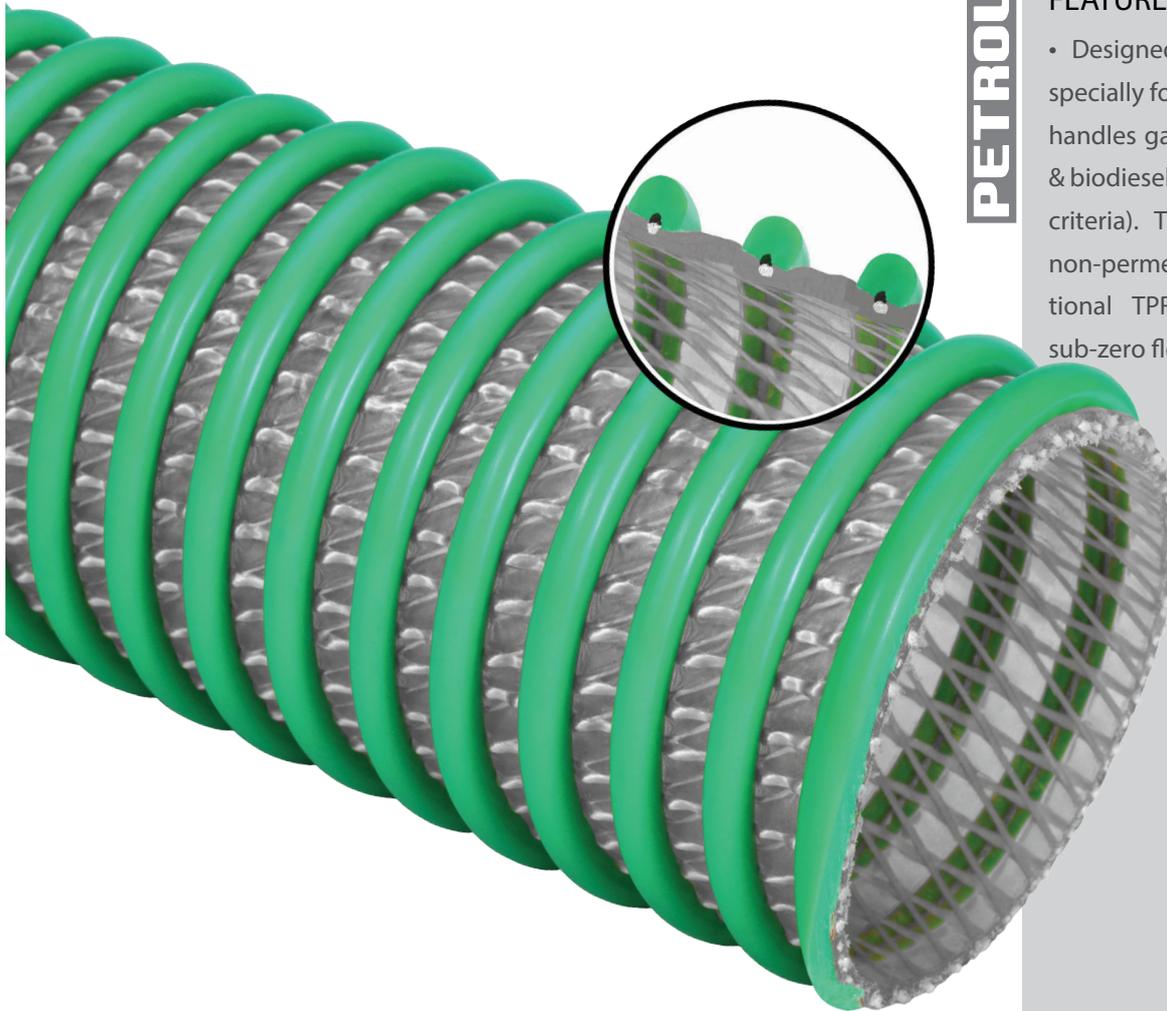

FEATURES & APPLICATIONS:

- Designed to be Biofuel compatible, this specially formulated polyurethane drop hose handles gasoline, ethanol (up to E98), diesel & biodiesel (up to B100 meeting ASTM D6751 criteria). The polyurethane construction is non-permeable, lighter weight than conventional TPR/Rubber hose, & has superior sub-zero flexibility. The clear side wall of Series 1980 allows for easy inspection of material flow & the external helix provides for easy drag.

TECHNICAL DATA:

- **Temp Range:** -40° F to +150° F
- **Cover:** Clear Polyurethane w/Polyester Braid Green Helix (static wire included)
- **Tube:** n/a
- **Reinforcement:** n/a
- **Safety Factor:** 3:1 min
- **Branding:**

POLYESTER BRAID POLYURETHANE

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Vacuum Rating "HG"	Part #
3"	3.79"	100'	65	195	6"	1.21	n/a	1980 300
4"	4.80"	100'	65	195	8"	1.71	n/a	1980 400