




WATER

WATER

SLUDGE SUCTION & DISCHARGE

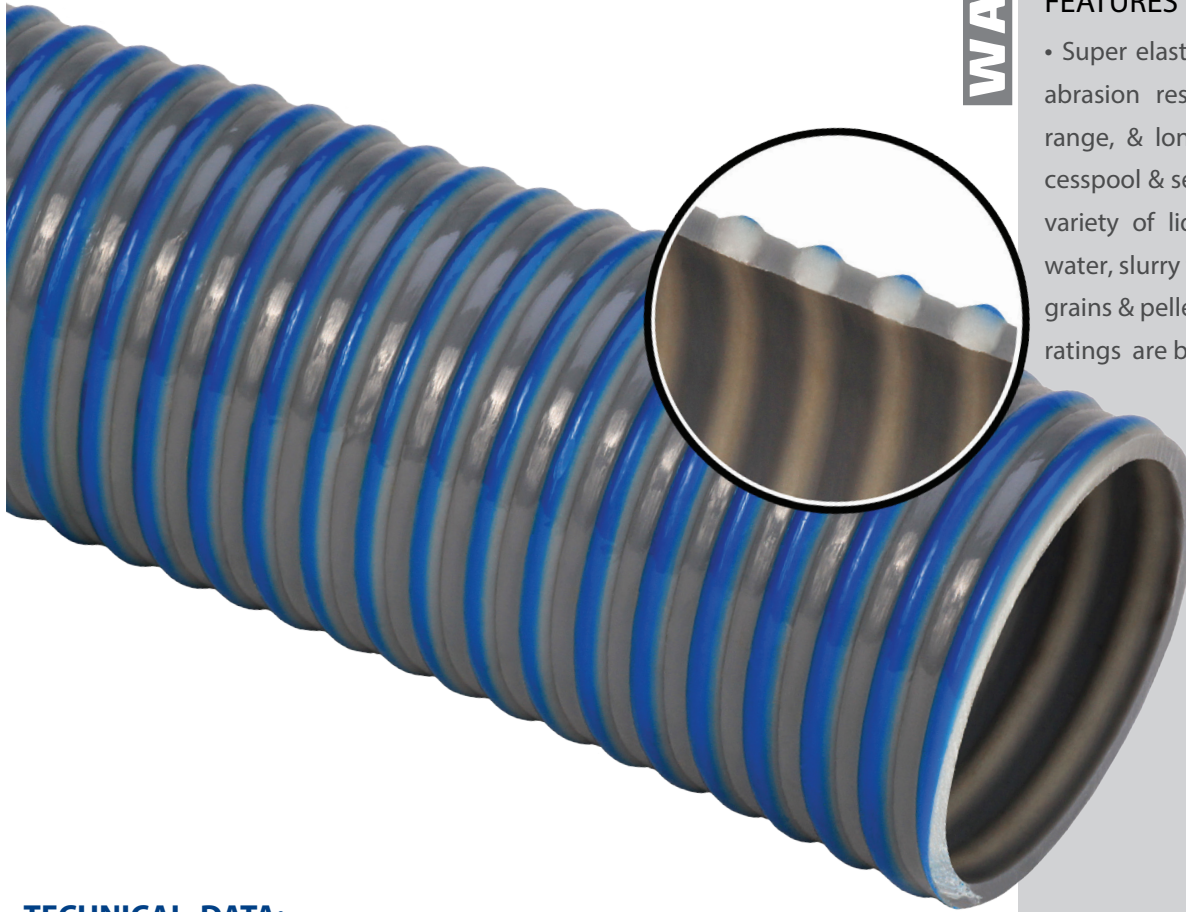

FEATURES & APPLICATIONS:

• Super elastic compound provides superior abrasion resistance, improved temperature range, & longer service life. Ideal hose for cesspool & septic tank applications. Handle a variety of liquid & solid materials such as water, slurry transfer, sewage, air, chemicals, grains & pellets. Working pressure & vacuum ratings are based on ambient temperature of 70° F & will vary inversely w/temperature changes.

TECHNICAL DATA:

- **Temp Range:** -15° F to +135° F
- **Cover:** Blue Helix PVC
- **Tube:** Grey PVC
- **Reinforcement:** Rigid White PVC w/Blue outer coating
- **Safety Factor:** 3:1 min
- **Branding:**

GREY PVC

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Vacuum Rating "HG"	Part #
1-1/2"	1.90"	100'	70	210	n/a	47	29	SL 150
2"	2.40"	100'	70	210	n/a	68	29	SL 200
3"	3.45"	100'	55	165	n/a	114	29	SL 300
4"	4.55"	100'	45	135	n/a	174	29	SL 400
6"	6.60"	20'/100'	35	105	n/a	322	28	SL 600