




SEALFAST
THE SIMPLE SOLUTION

SHEET RUBBER

NEOPRENE

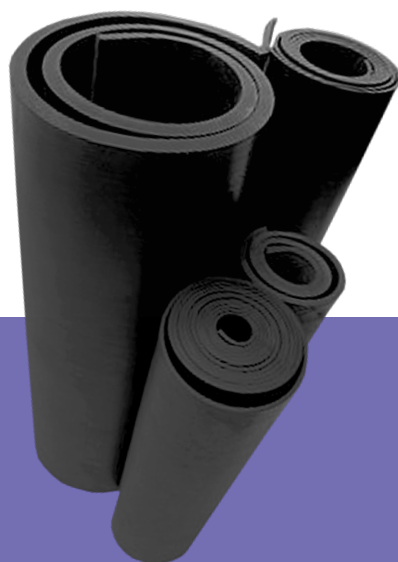

TECHNICAL DATA:

- **ASTM Designation:** CR
- **Composition:** Neoprene
- 60 Duromete +/- 5
- **Elongation:** MIN 300%
- **Tensile Strength:** MIN 430 psi

NEOPRENE 60 DUROMETER

COMMERCIAL GRADE - BLACK

FEATURES & APPLICATIONS:

- Good weather resistance Flame Retarding Moderate oil resistance to petroleum based fluids. Good physical properties.

NEOPRENE				
Thickness	Width	Avg. Length	Lbs per Roll	Part #
1/32"				
	36"	135'	100	CO-NE-60-1-36
1/16"				
	36"	72'	100	CO-NE-60-2-36
	48"	54'	100	CO-NE-60-2-48
3/32"				
	36"	48'	100	CO-NE-60-3-36
1/8"				
	36"	36'	100	CO-NE-60-4-36
	48"	27'	100	CO-NE-60-4-48
3/16"				
	36"	48'	200	CO-NE-60-6-36
	48"	36'	200	CO-NE-60-6-48
1/4"				
	36"	36'	200	CO-NE-60-8-36
	48"	27'	200	CO-NE-60-8-48
3/8"				
	36"	24'	200	CO-NE-60-12-36
	48"	18'	200	CO-NE-60-12-48
1/2"				
	36"	15'	200	CO-NE-60-16-36
	48"	13'	200	CO-NE-60-16-48
3/4"				
	36"	21'	351	CO-NE-60-24-36
	48"	21'	468	CO-NE-60-24-48
1"				
	36"	21'	468	CO-NE-60-32-36
	48"	21'	624	CO-NE-60-32-48



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.