




SEALFAST
THE SIMPLE SOLUTION


COUPLINGS & ACCESSORIES



TYPE CR

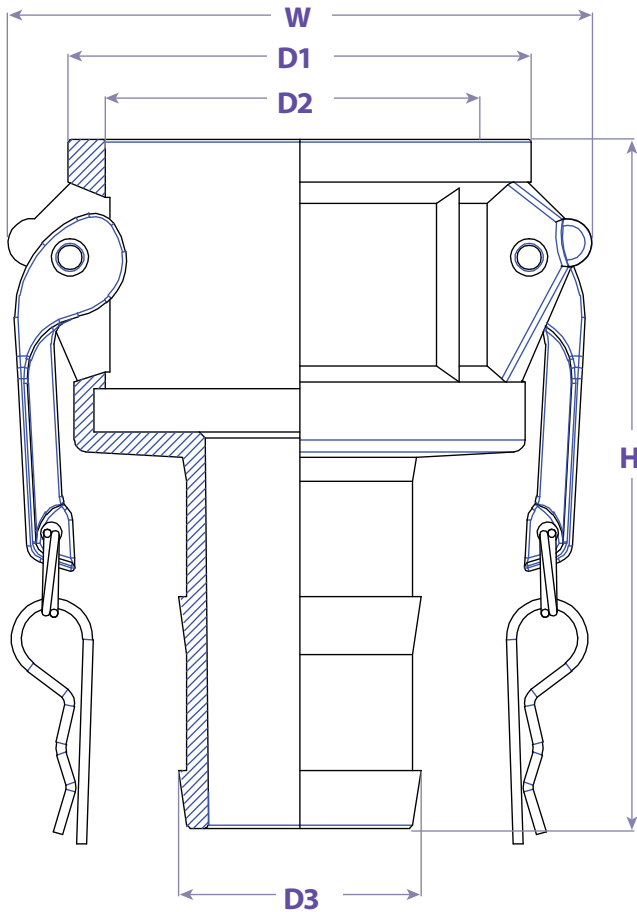

TYPE 1

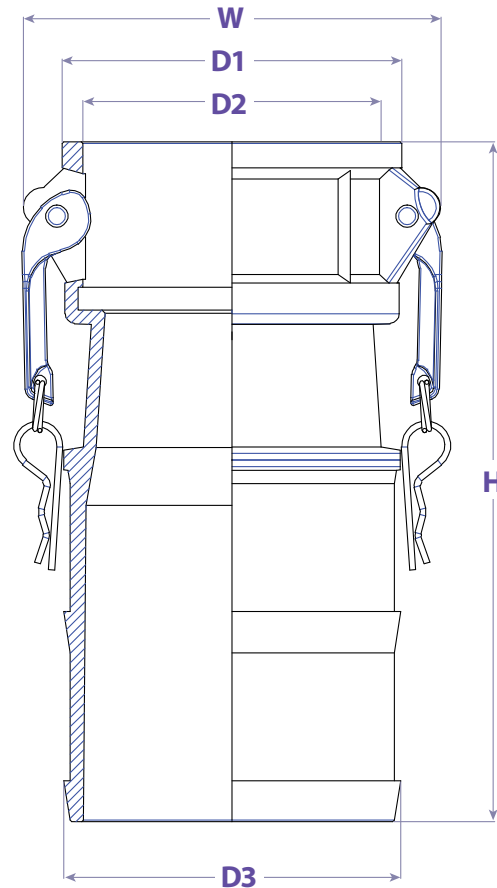

TYPE 2

FEATURES & APPLICATIONS:

• General Uses:

A camlock fitting is a type of coupling that is used to connecting hose and or pipes together that transfers liquids, powders and granules. A straight through connection is made that maintains the pipe size and allows the free flow of materials being transferred.

Size	Working PSI	TYPE	D1	D2	D3	H	W	PART #
1-1/2" x 1"	150	Type 1	2.571	2.122	1.047	4.055	3.469	CR1510AL
2" x 1"	150	Type 1	2.992	2.508	1.047	4.331	3.898	CR2010AL
2" x 1-1/4"	150	Type 2	2.992	2.508	1.567	4.449	3.780	CR2025AL
2" x 1-1/2"	150	Type 1	2.992	2.508	2.583	5.906	3.898	CR2015AL
2-1/2" x 1-1/2"	150	Type 1	3.520	3.008	1.559	4.724	4.425	CR2515AL
2-1/2" x 2"	150	Type 1	3.520	3.008	2.051	5.315	4.425	CR2520AL
3" x 2"	150	Type 1	4.154	3.626	2.067	5.453	5.079	CR3020AL
3" x 2-1/2"	150	Type 1	4.154	3.626	2.598	5.331	5.079	CR3025AL
3" x 4"	150	Type 2	4.134	3.626	4.098	8.268	5.079	CR3040AL
4" x 3"	150	Type 1	5.354	4.732	3.098	6.378	6.181	CR4030AL

WARNING: Cam & Groove Couplings should **NOT** be used with any compressed gas, including steam or air. Metal fittings should **NOT** be used with Polypropylene Cam & Groove. Dust Caps and Dust Plugs are **NOT** designed for pressure applications.

Note: All Seal Fast Cam & Groove Stainless Bodies are 316 Investment with 304 Handles.

TITLE **TYPE CR - FEMALE COUPLER X SHANK REDUCING C**

DISCLAIMER

All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions in the drawing will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL

A226AL

DRAWING NOT TO SCALE

PART

CR...AL

