




**WIRE AIR -
YELLOW**

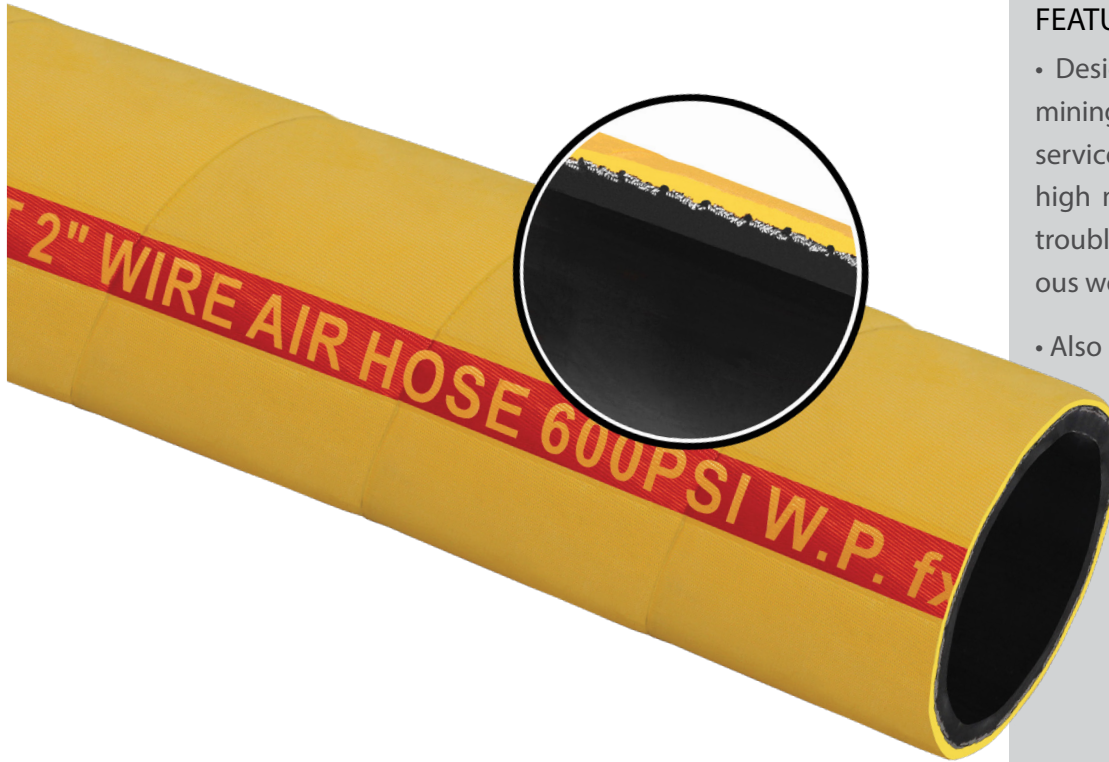

FEATURES & APPLICATIONS:

- Designed for the most severe jobs in mining, quarries, industrial & construction service, this mandrel built hose has a high margin of safety & gives a long & trouble-free service under the most arduous working conditions.
- Also known as "Bull Hose".

TECHNICAL DATA:

- **Temp Range:** -40° F to +248° F
- **Cover:** Yellow EPDM
- **Tube:** Black, smooth synthetic rubber. Heat & oil mist resistant (SBR)
- **Reinforcement:** Plies of steel wire cord
- **Safety Factor:** 4:1 min
- **Branding:**



YELLOW EPDM / SBR

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Part #
1/2"	.91"	50'	1000	4000	6"	.37	WA 050
3/4"	1.14"	50'	1000	4000	9"	.50	WA 075
1"	1.42"	50'	800	3200	12"	.65	WA 100
1-1/4"	1.69"	50'	800	3200	15"	.80	WA 125
1-1/2"	1.97"	50'	800	3200	18"	1.05	WA 150
2"	2.52"	50' / 100'	600	2400	24"	1.50	WA 200
2-1/2"	3.07"	50'	500	2000	31"	2.00	WA 250
3"	3.62"	50'	500	2000	36"	2.50	WA 300
4"	4.80"	50'	500	2000	48"	3.90	WA 400

Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.