




SEALFAST
THE SIMPLE SOLUTION


COUPLINGS & ACCESSORIES

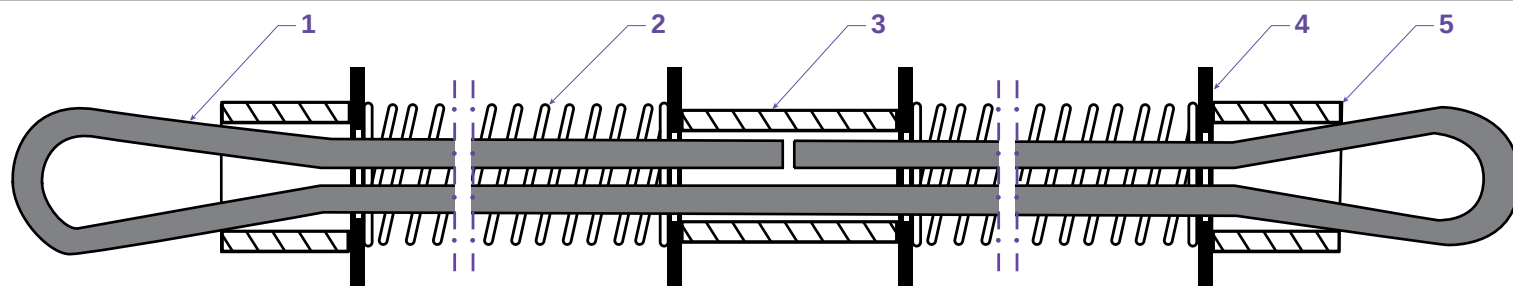


1 - STEEL CABLE (ZINC PLATED)




2 - SPRING

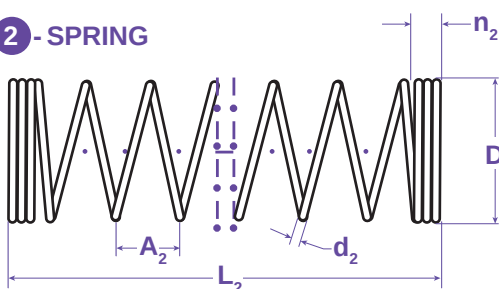


3 - TIP

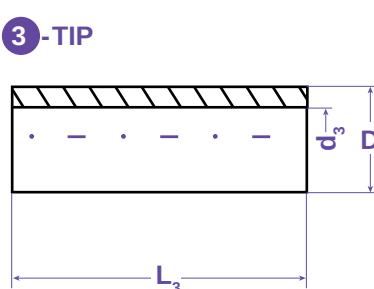

4 - WASHER



5 - LIMITER

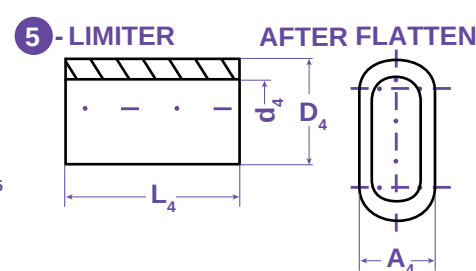

Size	Hose Size	PSI	PART #	L1	L2	L3	L4	L5	D1	D2	D3	D4	D5	d2	d3	d4	d5	A2	A4
1/8" x 20" long	1/2" to 1-1/4"	200	WC 1B/SS	40.95	7.874	1.417	0.669	0.039	0.118	0.433	0.413	0.413	0.669	0.039	0.256	0.256	0.315	0.158	0.177
3/16" x 28" long	1/2" to 2"	200	WC 3B/SS	78.74	13.780	1.772	0.787	0.039	0.236	0.787	0.629	0.709	0.945	0.063	0.433	0.512	0.512	0.276	0.354
1/4" x 38" long	1-1/2" to 3"	200	WC 2B/SS	56.30	9.252	2.126	0.984	0.079	0.177	0.571	0.551	0.629	0.984	0.063	0.354	0.433	0.433	0.181	0.236
3/8" x 44" long	4"	200	WC 4B/SS	92.13	13.780	3.150	1.417	0.138	0.354	0.965	1.004	1.004	1.457	0.079	0.689	0.847	0.827	0.256	0.472

FEATURES & APPLICATIONS:

• General Uses:

A positive Safeguard for Air Hose Connections-Helps you Meet Today's Safety standards. These strong steel cables prevent hose whip in case of accidental separation of coupling or clamp device. "SAFETY CABLE" reaches across the hose fittings to provide standby safety for hose. Spring-loaded loops in the cable ends open easily to pass over the coupling for a firm grip on the hose. "SAFETY CABLE" should be installed in the extended position (no slack). **MAXIMUM WORKING PRESSURE: 200 psi for Air.**

• **USE "SAFETY CABLE" TO HELP PREVENT ACCIDENTS OR INJURY RESULTING FROM HOSE OR COUPLING FAILURE.**

Type/Dimension		WC 1..	WC 2..	WC 3..	WC 4..
WC...B	WC...SS				
1. Steel cable (Zinc plated)	1. SUS304 Steel cable	Fi 0.1181	Fi 0.2362	Fi 0.1772	Fi 0.3543
2. Spring wire	2. SUS304 Steel Spring wire	Fi 0.0394	Fi 0.063	Fi 0.063	Fi 0.0787
3. Tip-Aluminum	3. Tip -SUS304 Steel pipe	Fi 0.413 x 0.079	Fi 0.63 x 0.098	Fi 0.551x 0.098	Fi 1.004x 0.157
4. Limiter - Aluminum	4. Limiter - SUS304 Steel pipe	Fi 0.413 x 0.079	Fi 0.709 x 0.098	Fi 0.63 x 0.098	Fi 1.004x 0.157
5. Washer (4 ea)	5. Washer - SUS304 Steel pipe	Fi 0.669 x 0.315 x 0.039	Fi 0.945 x 0.512 x 0.039	Fi 0.984 x 0.433 x 0.079	Fi 1.457 x 0.827 x 0.138

TITLE

SAFTEY CABLE - HOSE TO HOSE

DISCLAIMER

All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions in the drawing will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL

**PLATED CARBON STEEL
SUS 304**

DRAWING NOT TO SCALE

PART #

WC...B/SS

