


TYPE E

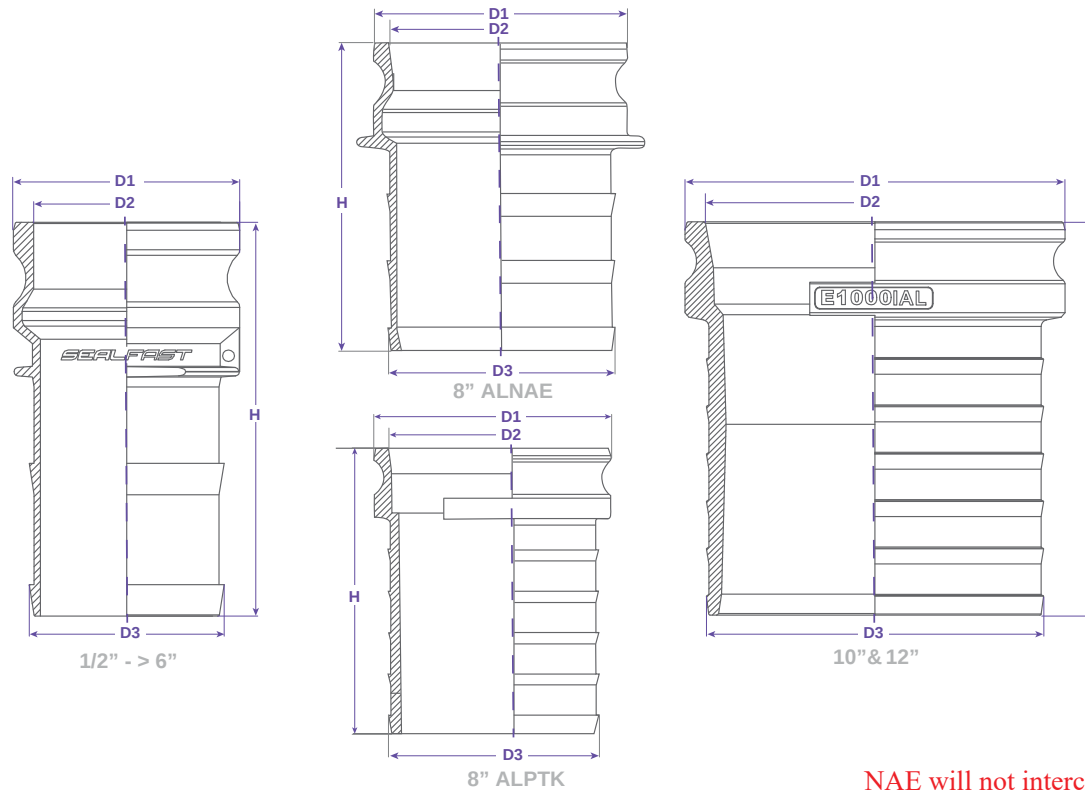

NAE will not interchange with PTK small body

Size	Working PSI	D1	D2	D3	H	PART #
1/2"	0	0.957	0.547	0.595	2.697	E050IAL
3/4"	0	1.264	0.847	0.843	3.564	E075IAL
1"	0	1.445	0.955	1.051	3.976	E100IAL
1-1/4"	0	1.791	1.146	1.319	4.252	E125IAL
1-1/2"	0	2.102	1.449	1.567	4.488	E150IAL
2"	0	2.484	1.826	2.067	5.118	E200IAL
2-1/2"	0	2.984	2.243	2.599	5.551	E250IAL
3"	0	3.602	2.901	3.099	6.496	E300IAL
4"	0	4.705	3.901	4.099	6.811	E400IAL
5"	0	5.728	5.003	5.127	7.795	E500IAL
6"	0	6.925	5.955	6.127	8.898	E600IAL
8"	0	9.091	7.985	8.110	11.024	E800IALNAE
8"	0	8.921	7.992	8.051	9.213	E800IALPTK
10"	0	11.371	10.140	10.083	11.767	E1000IAL
12"	0	13.444	12.332	10.131	11.619	E1200IAL

FEATURES & APPLICATIONS:

• **General Uses:**

A camlock fitting is a type of coupling that is used to connecting hose and or pipes together that transfers liquids, powders and granules. A straight through connection is made that maintains the pipe size and allows the free flow of materials being transferred.

WARNING: Cam & Groove Couplings should NOT be used with any compressed gas, including steam or air. Metal fittings should NOT be used with Polypropylene Cam & Groove. Dust Caps and Dust Plugs are NOT designed for pressure applications.

Note: All Seal Fast Cam & Groove Stainless Bodies are 316 Investment with 304 Handles.

TITLE TYPE E - MALE ADAPTER X SHANK	
<p>DISCLAIMER</p> <p>All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions in the drawing will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.</p>	<p>MATERIAL</p> <p>A226AL</p>
<p>DRAWING NOT TO SCALE</p>	<p>PART #</p> <p>E...IAL</p>

