

VALVES ANGLE HOSE - F X M CAST BRASS

FEATURES & APPLICATIONS:

- Working PSI (150) WOG
- DRY SYSTEM: Pipe is maintained empty of water
- WET standpipe system: Pipes are kept full of water for manual or automatic fire fighting operations



TECHNICAL DATA:


• **WOG** = Rating indicates the maximum non-shock pressure at ambient temperatures at which the valve may be used.

• **CWP** = Cold working pressure

WOG: Water, Oil & Gas: This was an older, generic pressure rating call-out which has been largely replaced by CWP. In this designation, GAS" refers to any non-flammable, compressible fluid in a gaseous state. It does not imply a product's suitability or third-party approval for use with flammable gases. Similarly, in this designation, "Oil" does not imply a product's third-party approval for use with any petroleum products.

BRASS	
Size	Part #
1-1/2" F NPT x 1-1/2" M NST	2815725




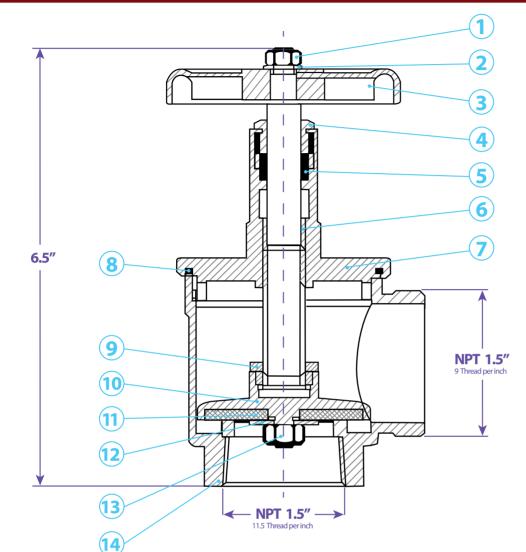

Material						
No.	Description	ption # Material				
1	Nut	1	S/S			
2	Washer	1	S/S			
3	Hand Wheel	1	AL-6061			
4	Nut	1	HPb59-1			
5	PTF4 Gasket	1	F4			
6	Valve Stem	1	HPb59-1			
7	Cover	1	HPb59-1			
8	NBR Washer	1	NBR			
9	Under Nut	1	HPb59-1			
10	Bonnet Nut	1	HPb59-1			
11	NBR Washer	1	NBR			
12	Washer	1	HPb59-1			
13	Nut	1	Steel Chromed			
14	Valve Body	1	HPb59-1			

Dimensions							
D	L	L1	d	g	Part #		
1-1/4″	6.3740	3.7402	1.2795	0.1260	SF125xxxx		
1-1/2″	6.3740	3.7402	1.5315	0.1260	SF150xxxx		
2″	8.0000	4.9606	2.0315	0.1260	SF200xxxx		
2-1/2″	8.0000	4.9606	2.5315	0.1575	SF250xxxx		
3″	8.3740	4.9606	3.0315	0.1575	SF300xxxx		
4″	8.3740	4.9606	4.0315	0.1575	SF400xxxx		

VALVES - ANGLE HOSE - F X M - 1.5" Fire Hydrant - 1.5"NPT - 1.5" NST

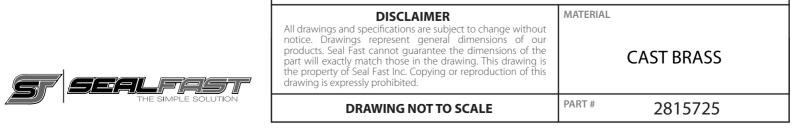

800.231.0734

sealfast.com