



**SEALFAST**  
THE SIMPLE SOLUTION

# PIPE FITTINGS & VALVES



## VALVES

FULL SIZE NEEDLE -  
STD ANGLE - CARBON STEEL  
6,000 PSI - M X F

### FEATURES & APPLICATIONS:

- Sizes available from 1/4" TO 1/2"
- Screwed double bonnet assembly, Body to bonnet metal seat
- Pressure rated for 6000 psi @ 98° F
- Stem seat : 6,000 psi :Delrin soft seat
- Available in materials 316 SS & Carbon Steel

### FEATURES :

- Temperature rating from -65° to 450°F
- Hardened V metal tip design .
- Back seat stem to prevent accidental removal
- Dust & thread caps provided for ingress dust protection

• WOG = Rating indicates the maximum non-shock pressure at ambient temperatures at which the valve may be used.

• CWP = Cold working pressure

### CARBON STEEL

Size	INLET / OUTLET	6,000 psi #
1/4"	M x F	NVCA4M4F-6
1/2"	M x F	NVCA8M8F-6




Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.



**SEALFAST**  
THE SIMPLE SOLUTION

# PIPE FITTINGS & VALVES

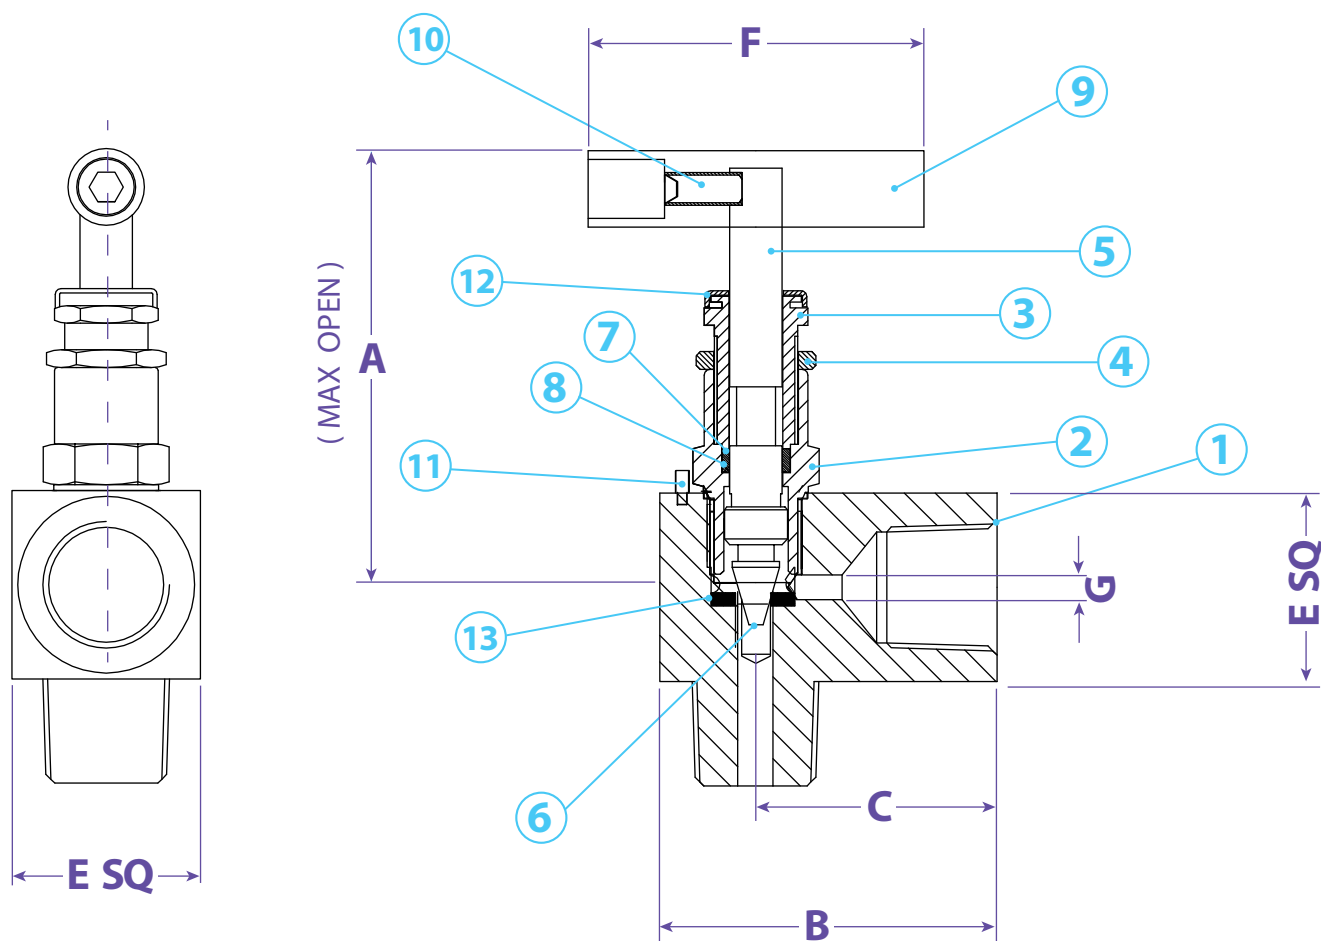

## Dimensions

Size		A	B	C	ESQ	F	G	Part #
1/4"	M x F	3.4	1.5	1.0	.98	2.0	.16	NVCA4M4F-6
1/2"	M x F	3.6	2.0	1.3	1.3	2.0	.18	NVCA8M8F-6

## Material

No.	Description	Qty.	Material
1	Body	1	CS
2	Bonnet	1	CS
3	Adj. Bonnet	1	CS
4	Locking Nut	1	CS
5	Stem	1	304 SS
6	Rotating Tip	1	17.4 PH
7	O-Ring	1	Viton
8	Packing	1	Teflon
9	Handle	1	CS
10	Allen Screw	1	CS
11	Stoper Pin	1	SS
12	Dust Cap	1	Nylon
13	Soft Seat	1	Derlin

TITLE

**NEEDLE VALVES - STD ANGLE, SOFT SEAT - 6K - M x F**

### DISCLAIMER

All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions of the part will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL

**CARBON STEEL**

**DRAWING NOT TO SCALE**

PART #

**NVCA.M.F-6**



**SEALFAST**  
THE SIMPLE SOLUTION