

# PIPE FITTINGS







### **VALVES**

FULL SIZE NEEDLE -STD DOUBLE BONNET - 316 SS 10,000 PSI - METAL TO METAL SEAT - M X F

#### **FEATURES & APPLICATIONS:**

- Sizes available from 1/4" TO 1".
- Screwed double bonnet assembly, Body to bonnet metal seat .
- Pressure rated for 10,000 psi @ 98° F
- Stem seat: Metal to Metal
- Available in materials 316 SS & Carbon Steel

#### **FEATURES**:

- Temperature rating from -65° to 450°F
- · Hardened V metal tip design .
- Back seat stem to prevent accidental removal
- Dust & thread caps provided for ingress dust protection
- WOG = Rating indicates the maximum non-shock pressure at ambient temperatures at which the valve may be used.
- CWP = Cold working pressure

		316 SS
Size	INLET / OUTLET	10,000 psi #
1/4"	MxF	NVS4M4F-1
1/2"	MxF	NVS8M8F-1
3/4"	MxF	NVS12M12F-1
1"	MxF	NVS16M16F-1




Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.




## PIPE FITTINGS

& VALVES





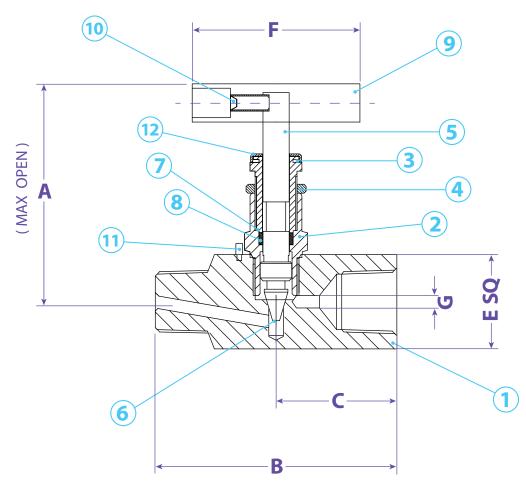

Dime	ension	S						
Size		Α	В	С	E SQ	F	G	Part #
1/4"	MxF	3.43	2.26	1.10	0.98	1.97	0.16	NVS4M4F-1
1/2"	MxF	3.56	2.95	1.67	1.26	1.97	0.18	NVS8M8F-1
3/4"	MxF	3.72	2.95	1.67	1.57	2.36	0.24	NVS12M12F-1
1″	MxF	4.70	3.74	1.70	1.77	2.36	0.28	NVS16M16F-1

TITLE

Mate	Material				
No.	Description	Qty.	Material		
1	Body	1	316 SS		
2	Bonnet	1	316 SS		
3	Adj. Bonnet	1	316 SS		
4	Locking Nut	1	316 SS		
5	Stem	1	316 SS		
6	Rotating Tip	1	17.4 PH		
7	Packing	1	SS		
8	Packing	1	Teflon		
9	Handle	1	316 SS		
10	Grub Screw	1	SS		
11	Stoper Pin	1	SS		
12	Dust Cap	1	Nylon		

<b>DISCLAIMER</b> All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions of the part will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.	MATERIAL 316 SS
DRAWING NOT TO SCALE	PART # NVS.M.F-1

