

PIPE FITTINGS





COMBINATION NIPPLES

MALENPT- STEEL, PLATED STEEL, SS 316 & SS 304

FEATURES & APPLICATIONS:

General Uses:

Working pressures may vary with type and clamping system used to install couplings.

Combination Nipples are recommended for low pressure discharge and suction service for compatible liquids. NOT for compressible products such as Air, Nitrogen and Steam.

*All blank end & grooved combination nipples are made using Schedule 40 pipe.

Seal Fast Crimp Combination Nipples are to be used with Seal Fast Ferrules and Crimp Sleeves. They are designed with an Interlock System which allows the Ferrule to be permanently attached to the coupling.

WORKING PRESSURE 200 PSI


STEEL & STAINLESS 316 - 304 **BLACK STEEL # PLATED STEEL #** 316 SS # 304 SS # SIZE 1/2" SF050S SF050SP SF050SS6 SF050SS 3/4" SF075S SF075SP SF075SS6 SF075SS 1" SF100S SF100SP SF100SS6 SF100SS 1-1/4" SF125S SF125SP SF125SS6 **SF125SS** 1-1/2" SF150SS SF150S SF150SP SF150SS6 2" SF200S SF200SP SF200SS6 SF200SS 2-1/2" SF250S SF250SP SF250SS6 SF250SS 3" SF300S SF300SP SF300SS6 SF300SS 4" SF400S SF400SP SF400SS6 SF400SS 5" SF500S SF500SP SF500SS6 SF500SS 6" SF600S SF600SP SF600SS6 SF600SS 8" SF800SS SF800S SF800SP SF1000SS 10" SF1000S SF1000SP 12" SF1200S SF1200SP

Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.







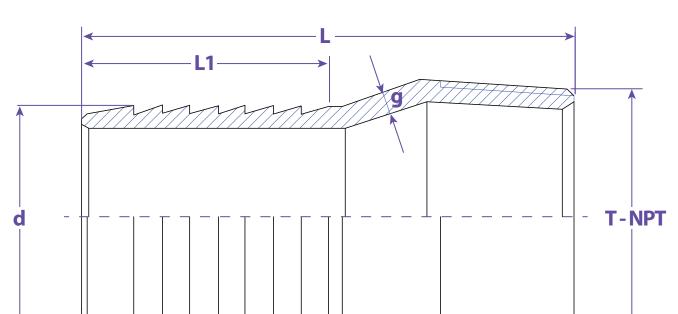

| Dimensions | | | | | |
|------------|---------|--------|---------|--------|-----------|
| Т | Г | L1 | d | g | Part # |
| 1/2" | 3.0315 | 1.5748 | 0.5354 | 0.0906 | SF050xxx |
| 3/4" | 3.0984 | 1.5748 | 0.7795 | 0.0906 | SF075xxx |
| 1" | 3.3071 | 1.6142 | 1.0354 | 0.1260 | SF100xxx |
| 1-1/4" | 3.9291 | 1.8504 | 1.2992 | 0.1260 | SF125xxx |
| 1-1/2" | 4.1063 | 2.1260 | 1.5354 | 0.1260 | SF150xxx |
| 2" | 4.7165 | 2.4803 | 2.0315 | 0.1260 | SF200xxx |
| 2-1/2" | 5.5236 | 2.8937 | 2.5315 | 0.1575 | SF250xxx |
| 3" | 6.0866 | 3.3858 | 3.0315 | 0.1575 | SF300xxx |
| 4" | 7.1850 | 3.8583 | 4.0315 | 0.1575 | SF400xxx |
| 5" | 8.8504 | 5.4331 | 5.0315 | 0.1969 | SF500xxx |
| 6" | 10.9134 | 6.4567 | 6.0472 | 0.2362 | SF600xxx |
| 8" | 12.1260 | 7.6378 | 8.0472 | 0.2756 | SF800xxx |
| 10" | 13.1102 | 7.6772 | 10.0787 | 0.2756 | SF1000xxx |
| 12" | 14.5276 | 9.2520 | 12.0866 | 0.3150 | SF1200xxx |

COMBINATION NIPPLES FOR STRAIGHT & HOSE - NPT THREAD

DISCLAIMER

All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions of the part will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL

SFxxxSP Carbon Steel Pipe SFxxxS Steel Pipe SFxxxSS6 Stainless Steel Pipe 316 SFxxxSS Stainless Steel Pipe 304

DRAWING NOT TO SCALE

PART #

SF...S, SP, SS6, SS

