

PIPE FITTINGS & VALVES






SCREW END BUTTERFLY - DUCTILE IRON

FEATURES & APPLICATIONS:

- 2 Position Handle
- Aluminum Bronze Disc w/Buna N O-Ring
- Working Pressure: 200 PSI




	BRASS
Size	Part #
3"	SV3
4 "	SV4



PIPE FITTINGS

& VALVES

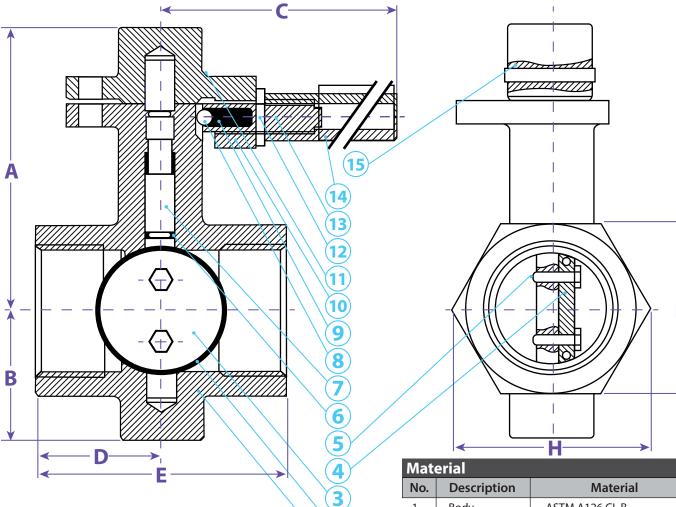

Dimensions									
Size	Α	В	C	D	Е	F	Н	Part #	
3"	6.02	2.75	8	2.43	4.87	4.06	4.69	SV 3	
4"	6.34	3.69	8	2.56	5.12	5.31	6.13	SV 4	

Mate	erial						
No.	Description	Material					
1	Body	ASTM A126 CL.B					
2	Seat	NBR / EPDM / VITON					
3	Disc	ASTM B148 C95400					
4	O-Ring	NBR / EPDM / VITON					
5	Bolts	ASTM A582 UNS41600					
6	O-Ring	NBR / EPDM / VITON					
7	Shaft	ASTM A582 UNS41600					
8	Ball	Bear Steel					
9	Spring	Spring Steel					
10	Lever	ASTM A536 65-45-12					
11	Name Plate	Brass					
12	Lock Nut	Steel					
13	Sleeve Joint	Steel					
14	Operting Bar	Steel					
15	Taper Pin	Steel					

DISCLAIMER				
All drawings and specifications are subject to change without				
notice. Drawings represent general dimensions of our products.				
Seal Fast Inc. cannot guarantee the dimensions will exactly match				
those in the drawing. The drawing is the property of Seal East Inc				

Copying or reproduction of this drawing is expressly prohibited.

DUCTILE IRON



DRAWING NOT TO SCALE

PART#

MATERIAL

SV.